

RADIANT

Lighting

3 X Selectable colour temp

Select desired colour output via front mounted switch. 3000K/4000K/6000K

Fire rated 30,60&90 MINS

Certified to fire rating standard BS476-21. 30,60 and 90 minutes.

Chameleon 10W Fire Rated Downlight

FR-10W-3BEZEL




Interchangeable bezels


Supplied with 3 interchangeable magnetic bezels. White/Chrome/Steel

Push fit wiring

Driver supplied with push fit loop terminals for easy installation.

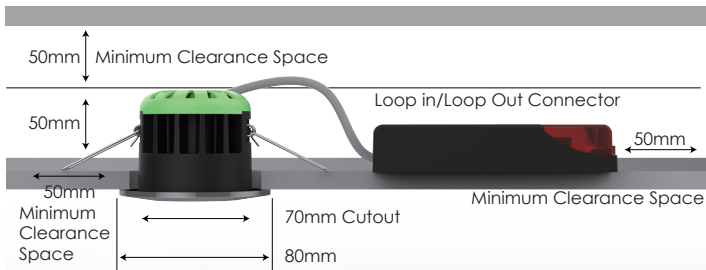

3 Fascias
White
Chrome
Brushed Steel

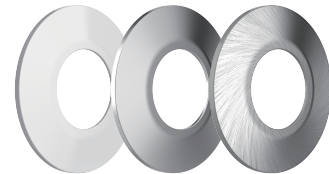

Product Specifications

Electrical

Input Voltage	200-240 VAC
Working Frequency	50 Hz
Input Current	0.1A
Output Voltage	24-30V
Output Current	285mA
Input Power	10W
Power Factor	≥0.9
Dimmable	Yes

Optical

LED Type	COB
CCT	3000K,4000K,6000K
Lumens	700lm-820lm
Light Efficiency	70lm/w
CRI	≥80
Beam Angle	40°
Lifespan	50000 hours

Physical


Finishing Colour	White/Chrome/Brushed steel
Housing Material	Aluminium
Orientation	Fixed
Connection	Loop-in and-Loop-out Connectors
Cut Out	70mm

Product Installation




This product must be installed by a qualified electrician ensuring to follow all current wiring regulations.

Ensure mains power is switched OFF before starting installation.

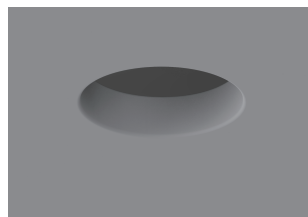


Step 1

Mark the desired light position and carefully cut out a hole of 67-70mm diameter.

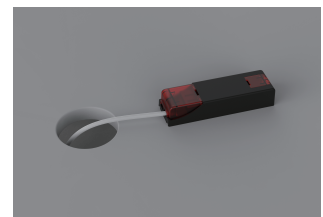

Step 2

Wire the driver to the mains circuit using the loop-in / loop-out connectors.

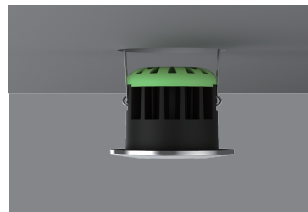

Step 3

Retract the spring arms and push the light into position.



Step 4

Attach your preferred magnetic bezel to the face of each light.

To change colour temperature after installation

1. Switch off the power 2. Remove magnetic bezel 3. Switch to desired colour temperature 4. Replace bezel 5. Switch on the power