





8W 100LM/W CCT CHANGEABLE WITH DIFFUSER




8W 100LM/W CCT CHANGEABLE WITH LENS




Dimmable



IC
rated




Beam angle
90°/60°




cutout
90mm

- CCT switchable option, 3000K & 4000K & 6000K
- IC-4 Insulation coverable
- Trailing Edge and Leading Edge Dimmable
- 100+ lm efficiency
- Available in diffuser and lens optic options
- Factory tooling product
- CE,ROHS,& SAA Compliance

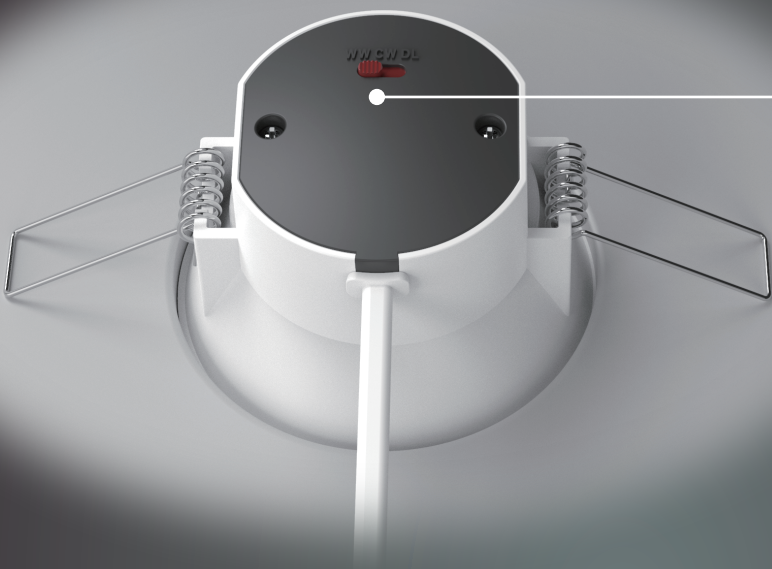

Tri-color Switch

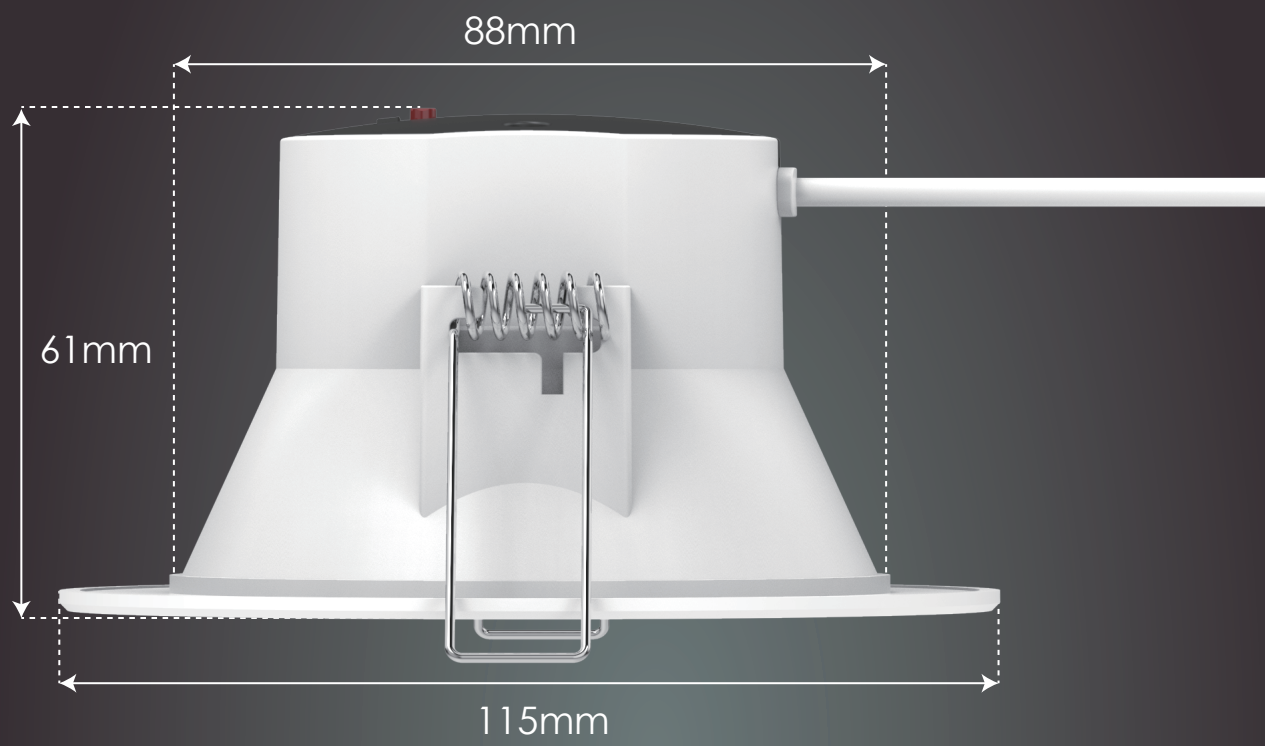

• 3000K Warm white



• 4000K Cool white



• 6000K Day light



Item	LED DOWNLIGHT	Cut Out	Φ90 mm
Part No.	5RS024	Driver	Built in
Power	8W	Dimmable	Trailing & Leading Edge
Output	800LM	Energy Class	A+ 8kWh/1000hr
Input	AC 220-240V~50Hz	Size	Drawing Supplied Above
CRI	80	Warranty	3 Years
Beam Angle	90°/60°	LED	SMD
Lifespan	30,000hrs	Switch Cycles	100,000
House Material	Aluminium+Plastic	Insulation Coverable	YES
PF	0.9	Operating Temp.	-30°C~45°C
Fire-rated	NA	Certification	SAA, C-tick ,CE ROHS