



# 5RS102

## Mild 7W low glare LED downlight




### KEY FEATURES

- 3CCT Switchable (2700K/3000K/4000K)
- Low glare UGR<19
- Interchangeable bezels
- IP65 (Front only), Bathroom Zone 1 & Zone 2
- Comply with RT2012/RE2020 thermal regulations
- Insulation coverable ,can be covered with blanket & blown insulation materials
- Fire rated certified both i-joint & solid joist ceiling




### Dimensions

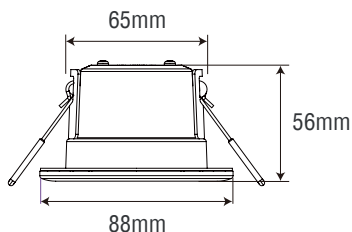

	5RS102-1 Twist & Lock	5RS102-2 Magnetic bezel
Total Power:	7W	7W
Size:	88×56mm	88×56mm
Cutout:	Φ 68mm	Φ 68mm
lm:	500-550 lm	500-550 lm
CCT Changeable:	2700K 3000K 4000K	2700K 3000K 4000K

## CCT switchable

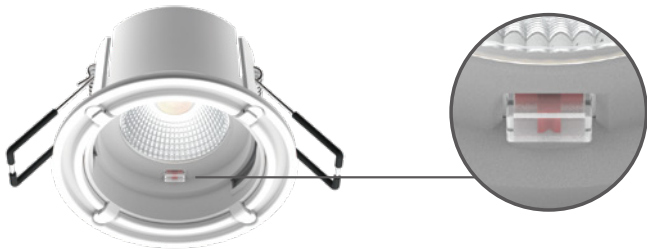

## Interchangeable bezels

