

5RS125/126



IP44 low glare fire-rated LED commercial downlight




KEY FEATURES

- 3CCT Switchable (3000K/4000K/6000K)
- Anti-glare design
- Interchangeable reflector(white/chrome/silver)
- High efficiency 105lm/w
- Tool-free wiring system
- Iron housing for Fire-rated





Dimensions



	5RS125-1	5RS126-1
Total Power:	15W	20W
Size(A×B×C):	175×110×148mm	217×120×198mm
Cutout:	Φ 150mm	Φ 200mm
lm/W:	≥105 lm/W	≥105 lm/W
CCT Changeable:	3000K 4000K 6000K	3000K 4000K 6000K

Interchangeable reflector

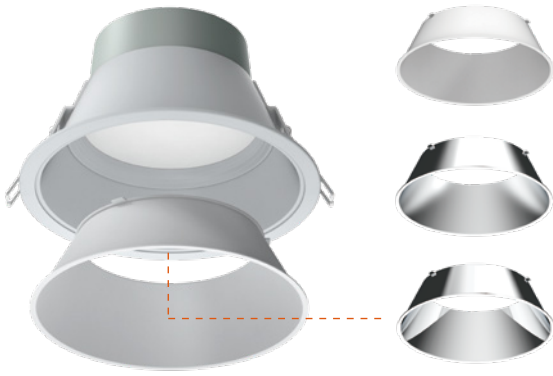

Tool-free terminals

