



5RS254

lediant®



Kaleido APP smart control low baffle RGB+W downlight

KEY FEATURES

- Main light/baffle light controlled by APP
- Tuya WiFi module inside
- Main light full CCT dimmable
- Different scenes settings
- Diamond reflector design
- Insulation coverable
- Compatiable with Radiant single live wire switch series

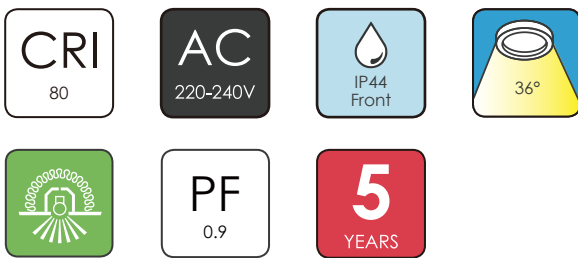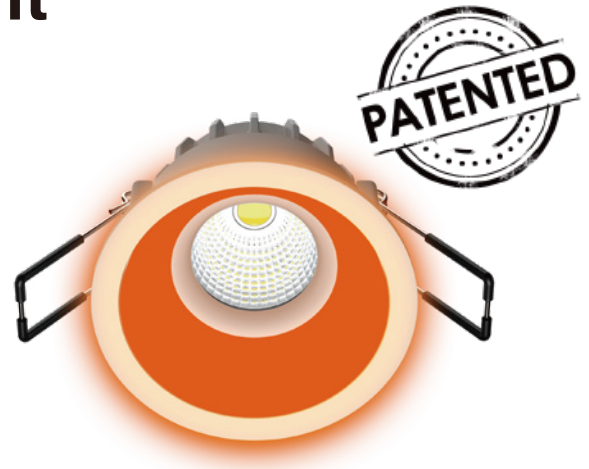

Dimensions

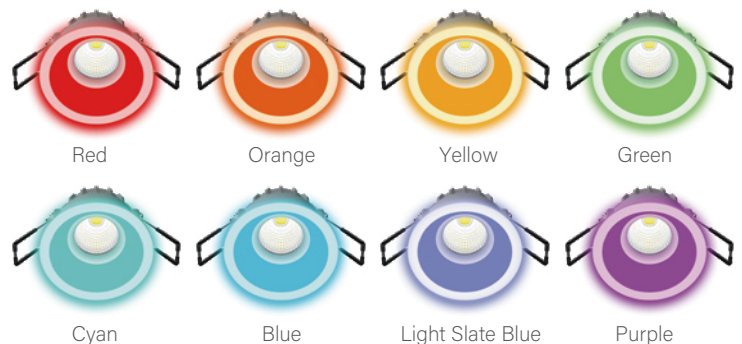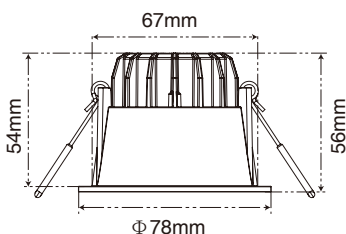

Part No.	5RS254	PF	≥ 0.9
Power	7W	IP	IP44 Front
CCT	2700K 3000K 4000K	Cut Out	Φ 78-56mm
Lumen	520-530lm	CRI	80
Input	AC 220-240V~50Hz	Beam Angle	40°



Main light/
Ambient version



Remote setting
version




L/N Wiring
Version



One Live Version



Touch wall
switch



RC match with
wall switch



KEY FEATURES

- Only one live wiring needed
- Synchronization with remote control in mode setting
- Dimmable and CCT changing
- Ambient color changing
- Standard switch box

