
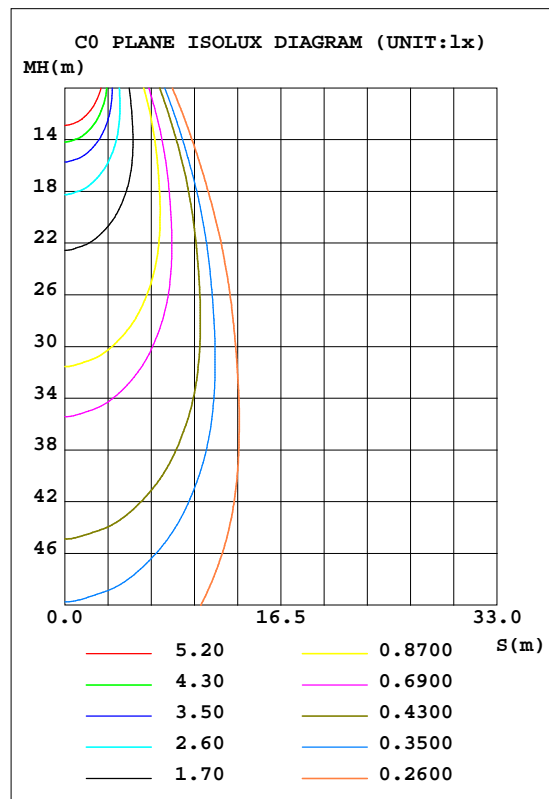


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.17 lm/W			
MODEL	5RS067-6000K	I _{max} (cd)	881.2	S/MH(C0/180)	0.64
NOMINAL POWER(W)	4	LOR(%)	100.0	S/MH(C90/270)	0.63
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	467.50	h UP, DN(C0-180)	0.0, 50.4
NOMINAL FLUX(lm)	467.497	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0, 49.6
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	231.2	h down(%)	100.0	CIBSE SHR MAX	0.65

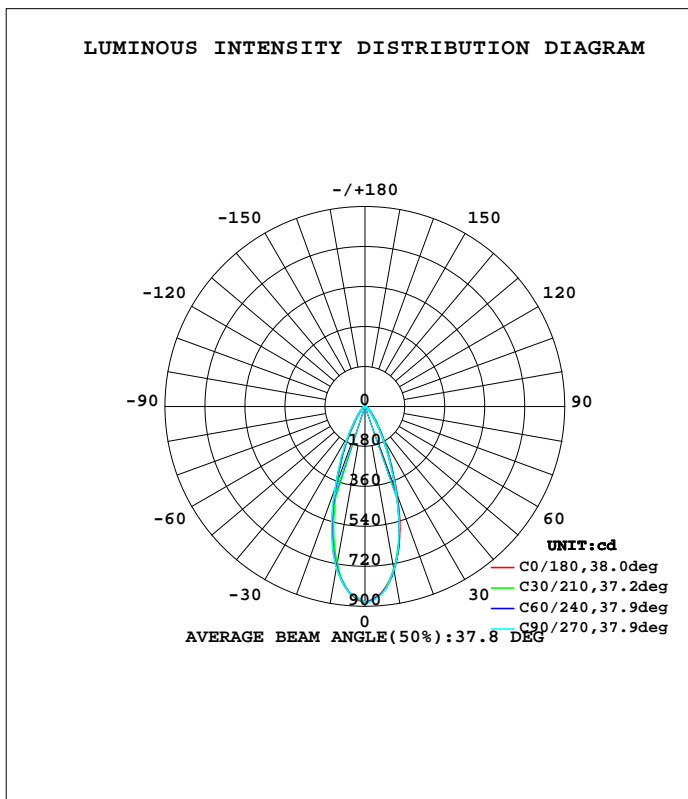

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

deg Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	748.2	746.8	747.5	734.6	734.2	725.4	738.4	736.2	0- 10	77.06	77.06	16.5,16.5
20	426.0	410.4	409.5	382.6	385.3	376.9	398.8	404.3	10- 20	158.4	235.5	50.4,50.4
30	158.9	163.3	152.0	143.0	137.7	140.4	147.9	164.2	20- 30	117.1	352.7	75.4,75.4
40	53.60	59.80	50.88	51.70	46.20	50.46	49.74	60.07	30- 40	56.69	409.3	87.6,87.6
50	22.92	26.20	22.96	23.47	21.58	22.15	22.03	27.08	40- 50	27.26	436.6	93.4,93.4
60	12.86	13.88	12.97	12.71	12.24	12.23	12.16	13.62	50- 60	15.65	452.3	96.7,96.7
70	6.896	7.618	6.899	6.834	6.619	6.846	6.620	7.657	60- 70	9.623	461.9	98.8,98.8
80	2.230	2.418	2.081	2.150	2.050	2.231	2.194	2.542	70- 80	4.684	466.6	99.8,99.8
90	0	0	0	0	0	0	0	0	80- 90	0.9327	467.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.98	.94	.98	.95	.92	.95	.93	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.87	.92	.88	.85	.90	.87	.84	.88	.85	.83	.81
4.0	.90	.85	.81	.89	.84	.80	.87	.83	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.79	.75	.82	.78	.74	.81	.77	.74	.79	.76	.73	.71
6.0	.80	.75	.70	.80	.74	.70	.78	.73	.70	.77	.73	.69	.75	.72	.69	.67
7.0	.76	.70	.66	.76	.70	.66	.74	.69	.66	.73	.69	.66	.72	.68	.65	.64
8.0	.72	.67	.63	.72	.66	.63	.71	.66	.62	.70	.65	.62	.69	.65	.62	.61
9.0	.69	.63	.60	.68	.63	.60	.68	.63	.59	.67	.62	.59	.66	.62	.59	.58
10.0	.66	.60	.57	.65	.60	.57	.65	.60	.57	.64	.59	.56	.63	.59	.56	.55

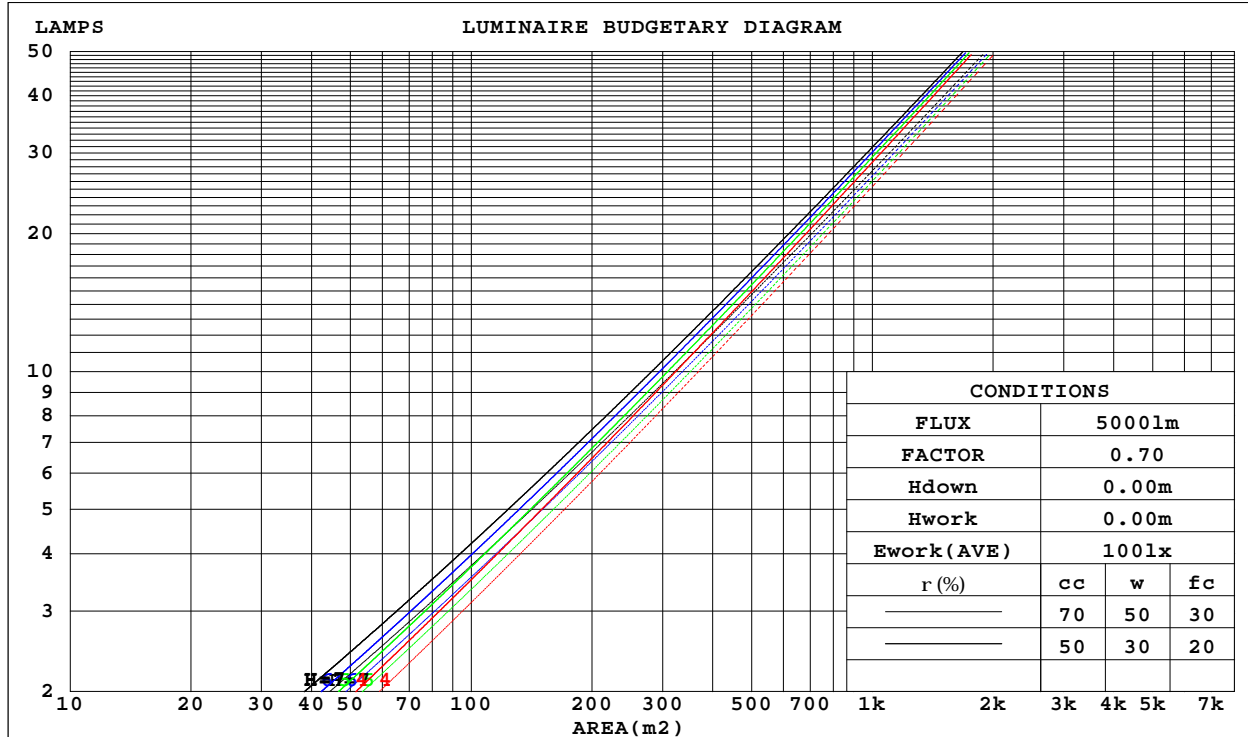

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

rcc	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.181	.103	.033	.175	.100	.032	.162	.093	.030	.150	.087	.028	.140	.081	.026	
2.0	.172	.094	.029	.166	.092	.028	.156	.087	.027	.146	.082	.026	.137	.077	.024	
3.0	.162	.086	.026	.157	.084	.025	.148	.080	.024	.140	.077	.024	.132	.073	.023	
4.0	.153	.079	.023	.149	.078	.023	.141	.075	.022	.134	.072	.022	.127	.069	.021	
5.0	.144	.074	.021	.141	.072	.021	.134	.070	.021	.128	.067	.020	.122	.065	.020	
6.0	.137	.068	.020	.134	.067	.019	.128	.065	.019	.122	.063	.019	.117	.062	.018	
7.0	.130	.064	.018	.127	.063	.018	.122	.062	.018	.117	.060	.017	.112	.058	.017	
8.0	.123	.060	.017	.121	.060	.017	.116	.058	.017	.112	.057	.016	.108	.055	.016	
9.0	.118	.057	.016	.116	.056	.016	.111	.055	.016	.107	.054	.015	.104	.053	.015	
10.0	.112	.054	.015	.111	.053	.015	.107	.052	.015	.103	.051	.015	.100	.050	.014	

rcc	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.147	.135	.124	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.132	.113	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.090	.123	.098	.078	.085	.068	.054	.049	.040	.032	.016	.013	.011	
4.0	.133	.099	.073	.114	.085	.063	.079	.060	.044	.045	.035	.026	.015	.011	.009	
5.0	.124	.087	.060	.107	.075	.052	.073	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.116	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.109	.070	.043	.094	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.103	.064	.037	.089	.055	.032	.062	.039	.023	.036	.023	.014	.012	.008	.004	
9.0	.098	.058	.032	.084	.051	.028	.058	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.093	.054	.028	.080	.047	.024	.056	.033	.017	.032	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm										
NAME: 5RS067-6000K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:001		
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.7	21.6	20.9	21.8	21.9	20.3	21.3	20.6	21.4	21.6
3H	21.2	22.0	21.4	22.2	22.4	20.9	21.8	21.2	21.9	22.2
4H	21.4	22.2	21.6	22.4	22.6	21.1	21.9	21.4	22.1	22.3
6H	21.5	22.2	21.7	22.5	22.7	21.2	21.9	21.4	22.2	22.4
8H	21.5	22.2	21.8	22.5	22.7	21.2	21.9	21.5	22.1	22.4
12H	21.5	22.2	21.8	22.4	22.7	21.1	21.9	21.5	22.1	22.4
4H 2H	20.9	21.7	21.1	21.9	22.1	20.6	21.4	20.8	21.6	21.8
3H	21.6	22.3	21.9	22.5	22.8	21.3	22.0	21.6	22.3	22.5
4H	21.8	22.5	22.2	22.8	23.1	21.5	22.2	21.9	22.5	22.8
6H	22.0	22.6	22.4	22.9	23.2	21.7	22.2	22.1	22.6	22.9
8H	22.0	22.6	22.4	22.9	23.3	21.7	22.2	22.1	22.6	23.0
12H	22.0	22.5	22.4	22.9	23.3	21.7	22.2	22.1	22.6	23.0
8H 4H	21.9	22.4	22.3	22.8	23.1	21.6	22.2	22.0	22.5	22.9
6H	22.1	22.6	22.6	23.0	23.4	21.8	22.3	22.2	22.6	23.1
8H	22.2	22.6	22.6	23.0	23.4	21.9	22.3	22.3	22.7	23.1
12H	22.2	22.5	22.7	23.0	23.5	21.9	22.2	22.4	22.7	23.1
12H 4H	21.9	22.3	22.3	22.7	23.1	21.6	22.1	22.0	22.5	22.8
6H	22.1	22.5	22.6	22.9	23.3	21.8	22.2	22.3	22.6	23.1
8H	22.2	22.5	22.7	23.0	23.4	21.9	22.2	22.4	22.7	23.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.9 / - 1.2					+ 0.8 / - 1.1				
1.5H	+ 1.4 / - 1.1					+ 1.3 / - 0.8				
2.0H	+ 1.4 / - 1.0					+ 1.0 / - 0.8				

CIE Pub.117 Corrected 467.5 lm Total Lamp Luminous Flux.(8log(F/F0) = -2.6)

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	84	77	73	83	77	73	82	76	72	69
0.80	92	85	81	91	85	81	90	84	80	76
1.00	97	90	86	96	90	86	94	90	85	81
1.25	101	95	91	100	94	91	98	93	90	85
1.50	104	99	95	103	98	94	100	96	93	88
2.00	107	102	99	106	101	98	103	99	97	91
2.50	109	105	101	107	103	100	104	101	99	92
3.00	111	107	104	109	105	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

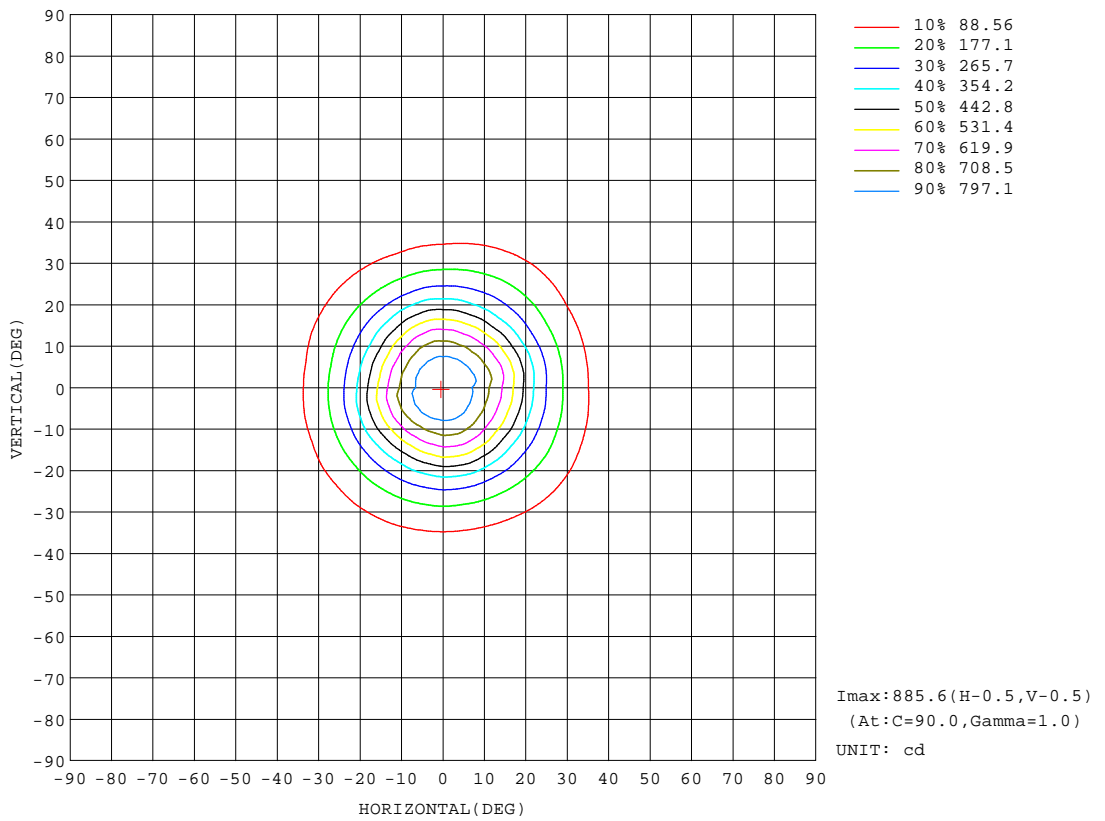


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

AAI Figure

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Flux out:220.2 lm

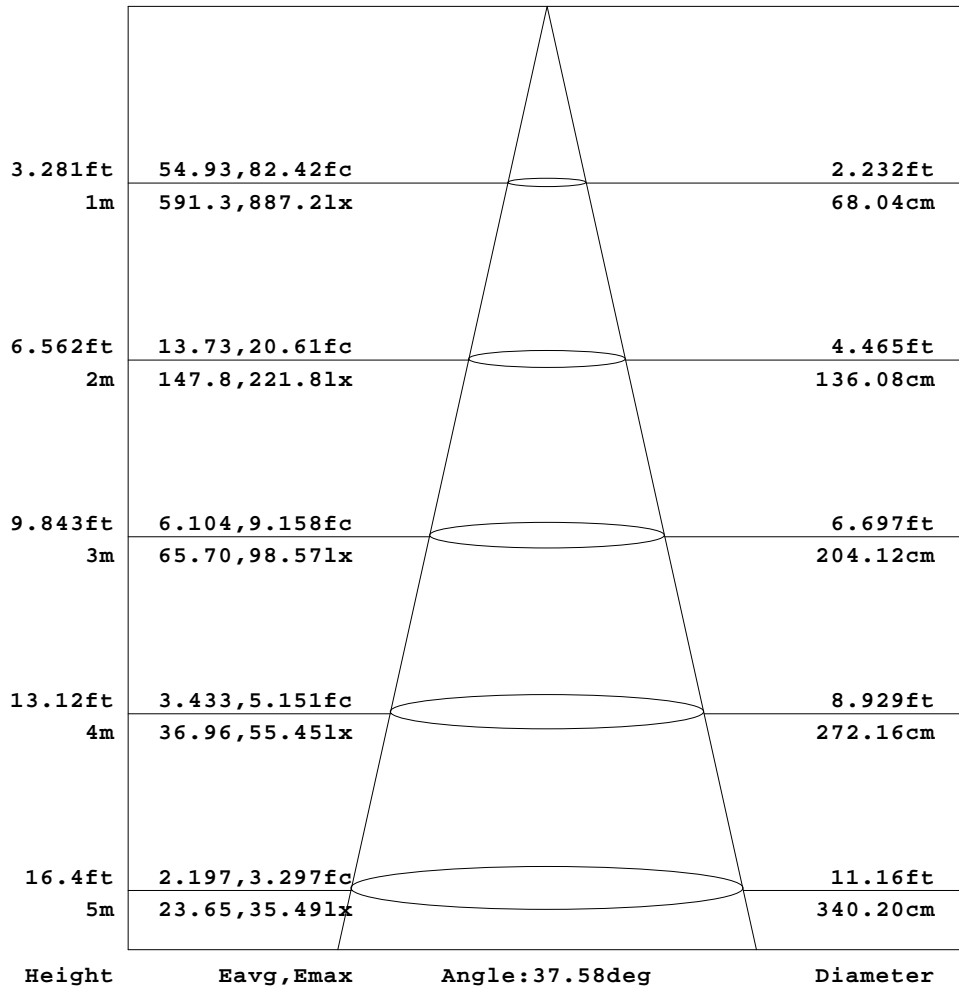


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

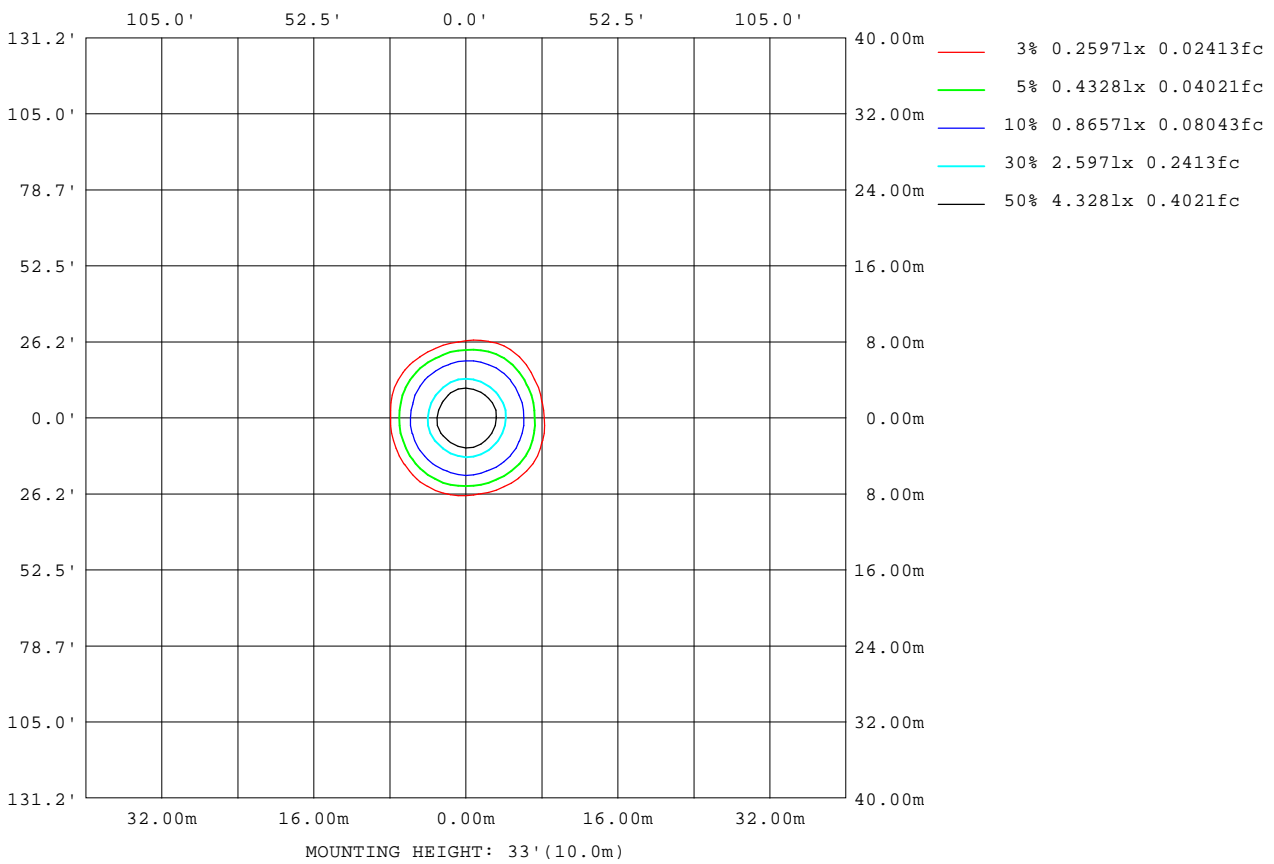

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 01
 Test Date: 2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity: 65.0%
 Test Distance: 8.989m [K=1.0000]
 Remarks:

Planar Illuminance Curve

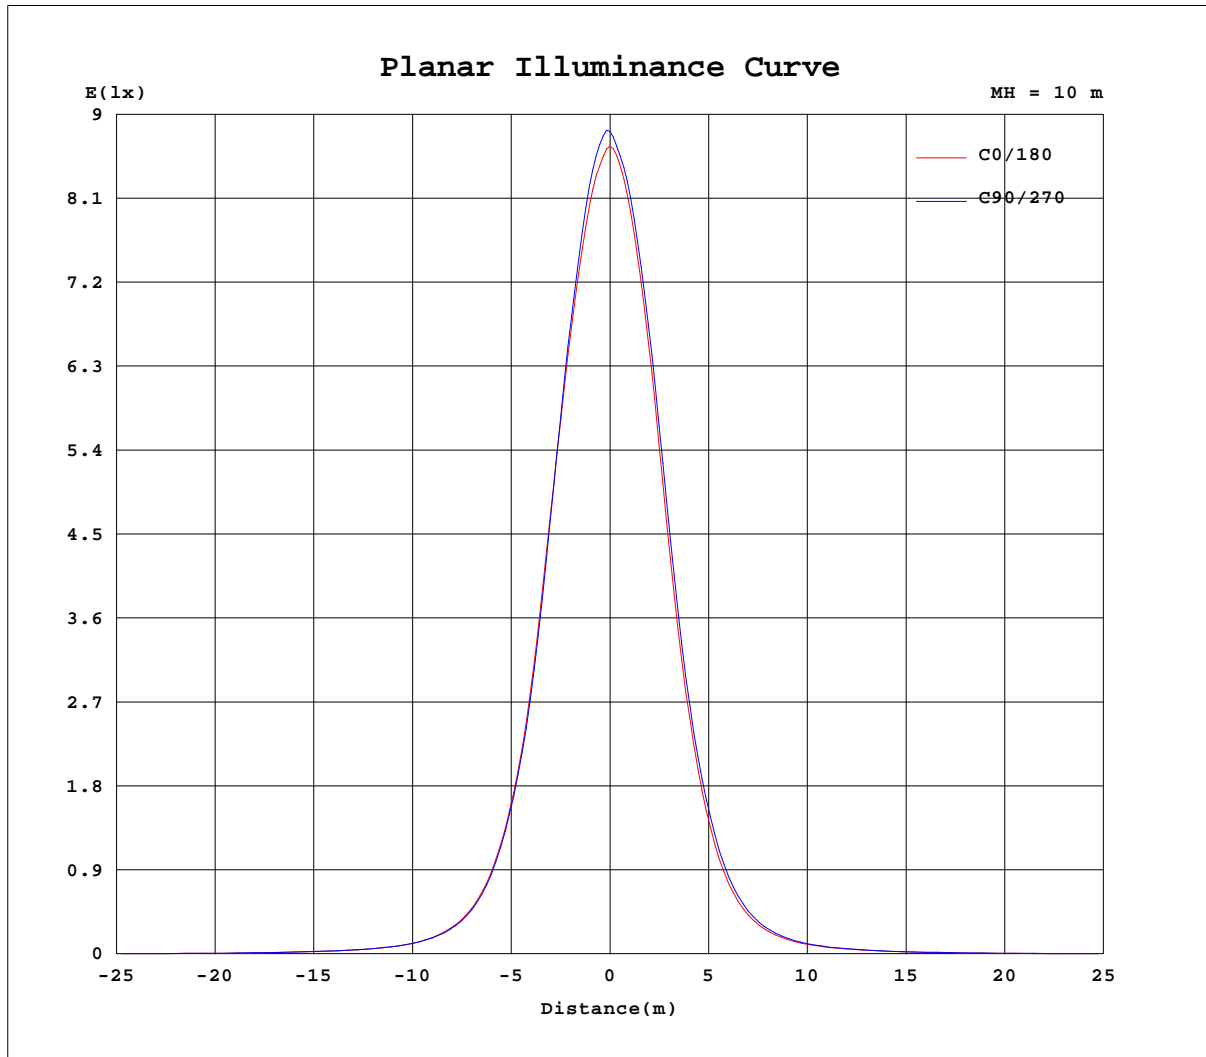

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 01
 Test Date: 2018-02-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity: 65.0%
 Test Distance: 8.989m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880
5	843	846	845	846	845	847	846	849	847	849	847	848	845	847	843	843	838	838	838
10	748	747	742	744	743	751	750	754	749	747	738	737	730	735	734	741	736	737	734
15	606	604	595	594	591	599	598	605	597	595	579	573	564	566	565	572	570	573	569
20	426	425	415	415	407	413	412	418	410	409	394	390	380	383	383	392	389	391	385
25	267	270	268	269	265	265	260	260	257	257	251	250	247	245	242	244	240	241	239
30	159	164	165	169	165	162	156	154	151	152	149	148	145	145	141	142	140	138	138
35	90.9	95.1	96.8	99.4	97.9	94.7	90.4	87.9	86.2	86.3	86.1	86.8	85.9	84.8	82.1	81.8	78.0	78.0	77.9
40	53.6	57.6	59.7	62.2	61.0	58.6	54.6	52.1	50.1	50.9	52.6	54.4	53.8	53.3	50.1	48.3	45.8	45.2	46.2
45	33.3	36.1	37.9	39.8	39.5	37.9	35.3	33.3	32.0	32.6	34.0	35.5	35.5	34.9	32.7	31.1	29.2	29.1	30.2
50	22.9	24.5	25.3	26.6	26.5	25.9	24.6	23.4	22.6	23.0	23.8	24.4	24.5	24.1	22.8	21.9	20.9	20.9	21.6
55	17.1	17.7	18.2	18.7	18.8	18.8	18.2	17.6	17.1	17.2	17.4	17.7	17.5	17.4	16.7	16.3	15.8	15.9	16.1
60	12.9	13.3	13.5	13.8	13.9	13.9	13.6	13.3	12.9	13.0	13.0	13.1	12.9	12.9	12.5	12.3	12.1	12.1	12.2
65	9.60	9.84	10.1	10.4	10.5	10.3	10.00	9.91	9.69	9.67	9.61	9.71	9.60	9.59	9.33	9.21	9.08	9.10	9.22
70	6.90	7.09	7.38	7.72	7.77	7.47	7.13	7.07	6.90	6.90	6.91	7.07	7.08	7.03	6.64	6.54	6.46	6.50	6.62
75	4.18	4.38	4.55	4.78	4.74	4.56	4.20	4.12	4.01	4.04	4.06	4.21	4.27	4.27	3.96	3.84	3.76	3.82	3.94
80	2.23	2.33	2.42	2.50	2.46	2.38	2.20	2.13	2.09	2.08	2.12	2.19	2.22	2.21	2.09	1.99	1.94	1.96	2.05
85	0.88	0.86	0.86	0.86	0.86	0.84	0.82	0.79	0.78	0.74	0.73	0.70	0.70	0.66	0.67	0.64	0.65	0.64	0.69
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.2V I:0.0228A P:4.282W PF:0.8139 Lamp Flux:467.497x1 lm		
NAME: 5RS067-6000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880	880		
5	837	839	837	838	836	837	836	838	837	838	838	841	841	844	843	844	845		
10	727	726	720	725	726	735	738	743	738	738	734	736	733	739	744	751	752		
15	556	556	548	558	561	575	580	590	583	582	576	582	583	594	599	613	613		
20	373	372	367	377	377	391	394	404	399	401	394	399	397	412	415	429	431		
25	236	238	239	240	241	243	244	251	252	256	258	263	262	264	262	268	269		
30	134	137	138	141	140	142	141	147	148	154	158	163	164	164	158	160	158		
35	77.6	81.7	82.0	82.4	81.5	79.9	78.9	82.5	83.9	89.5	93.9	96.2	97.5	95.6	90.7	90.7	89.8		
40	48.6	51.3	52.3	52.0	48.9	47.5	46.2	47.0	49.7	54.4	58.8	62.0	61.4	58.7	54.2	52.5	51.7		
45	31.9	33.9	34.0	33.4	31.4	30.5	29.2	29.8	31.6	35.8	39.4	41.9	41.1	38.4	35.1	33.1	32.4		
50	22.5	23.2	23.0	22.7	21.6	21.1	20.4	21.0	22.0	24.6	26.9	28.4	27.9	26.2	24.3	22.9	22.4		
55	16.5	16.8	16.6	16.4	15.9	15.6	15.4	15.6	16.2	17.5	18.5	19.4	19.1	18.6	17.7	17.1	16.8		
60	12.4	12.6	12.5	12.4	12.0	11.9	11.7	11.8	12.2	12.8	13.3	13.8	13.7	13.5	13.1	12.9	12.8		
65	9.30	9.56	9.50	9.42	9.12	8.98	8.86	9.00	9.13	9.53	9.94	10.3	10.3	10.1	9.76	9.67	9.59		
70	6.75	7.08	7.14	7.02	6.67	6.54	6.46	6.54	6.62	6.95	7.44	7.93	7.83	7.48	7.08	7.01	6.92		
75	4.04	4.33	4.40	4.39	4.15	4.09	4.01	4.08	4.10	4.43	4.76	5.09	4.95	4.76	4.41	4.37	4.26		
80	2.11	2.24	2.25	2.27	2.19	2.16	2.14	2.17	2.19	2.36	2.52	2.65	2.58	2.51	2.36	2.31	2.27		
85	0.66	0.64	0.61	0.65	0.71	0.77	0.80	0.81	0.85	0.88	0.89	0.91	0.93	0.93	0.95	0.94	0.94		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks: