




Tyrion 6W

Ultra slim **Tool-free** Fire rated downlight

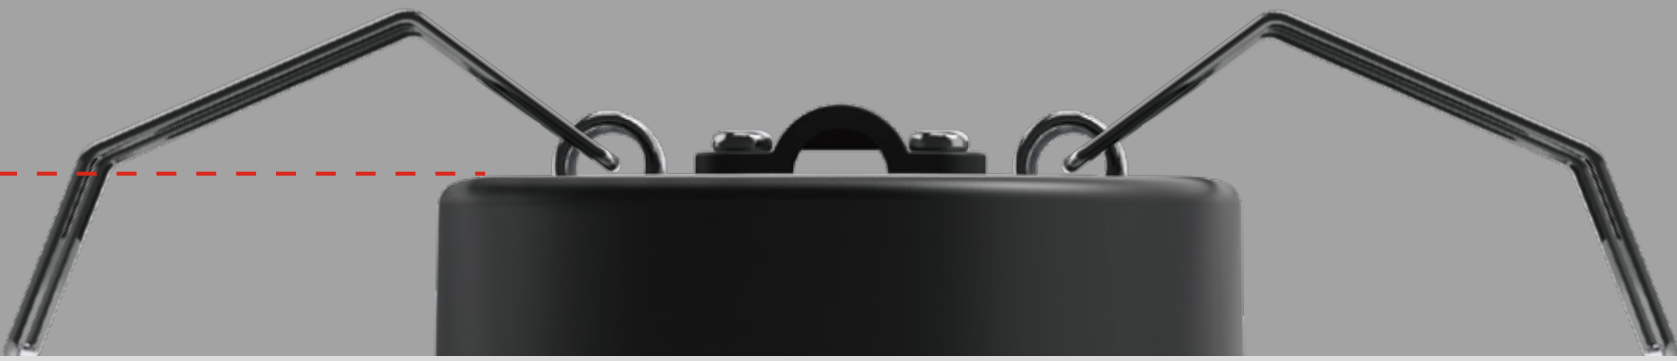


lediant®



Dimmable	CRI 80	AC 220-240V	IP65 Front	GROUPE 0 IEC 62471
Beam angle	Ø65-70mm	40°	Fire Rated	5 Years

Tyrion is ultra slim fittings with 26mm depth are allowed to be used low void space, The fitting is IP65 and Fire rated complies with the Part C (moisture), Part E (acoustic) & Part L (energy) of Building Regulations, approved for use in homes utilising new construction methods for floor, joist and ceiling combinations such as Metal-Web or I-Joists.

The 3CCT DIP switch under the bezel allows users to select and change the colour of light after installation. We integrated the plug & play connector fast-fit terminal into the driver allow the electricians to install the downlight quickly. The optic lens achieves the traditional aesthetic of a dichroic lamp with a clear light beam with gentle cut-off at the extremities for excellent lux level uniformity.

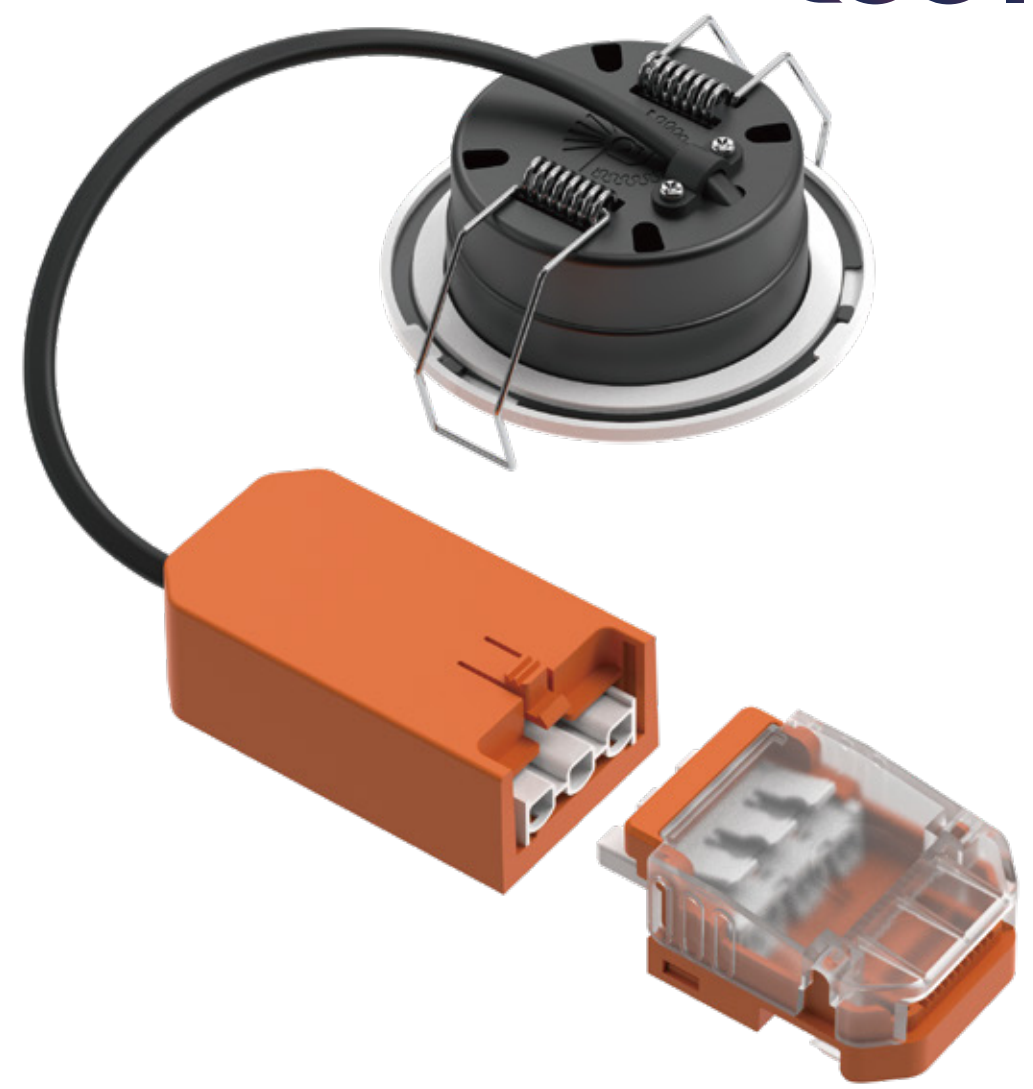

Plug & Play ~~Tool~~ Tool-free

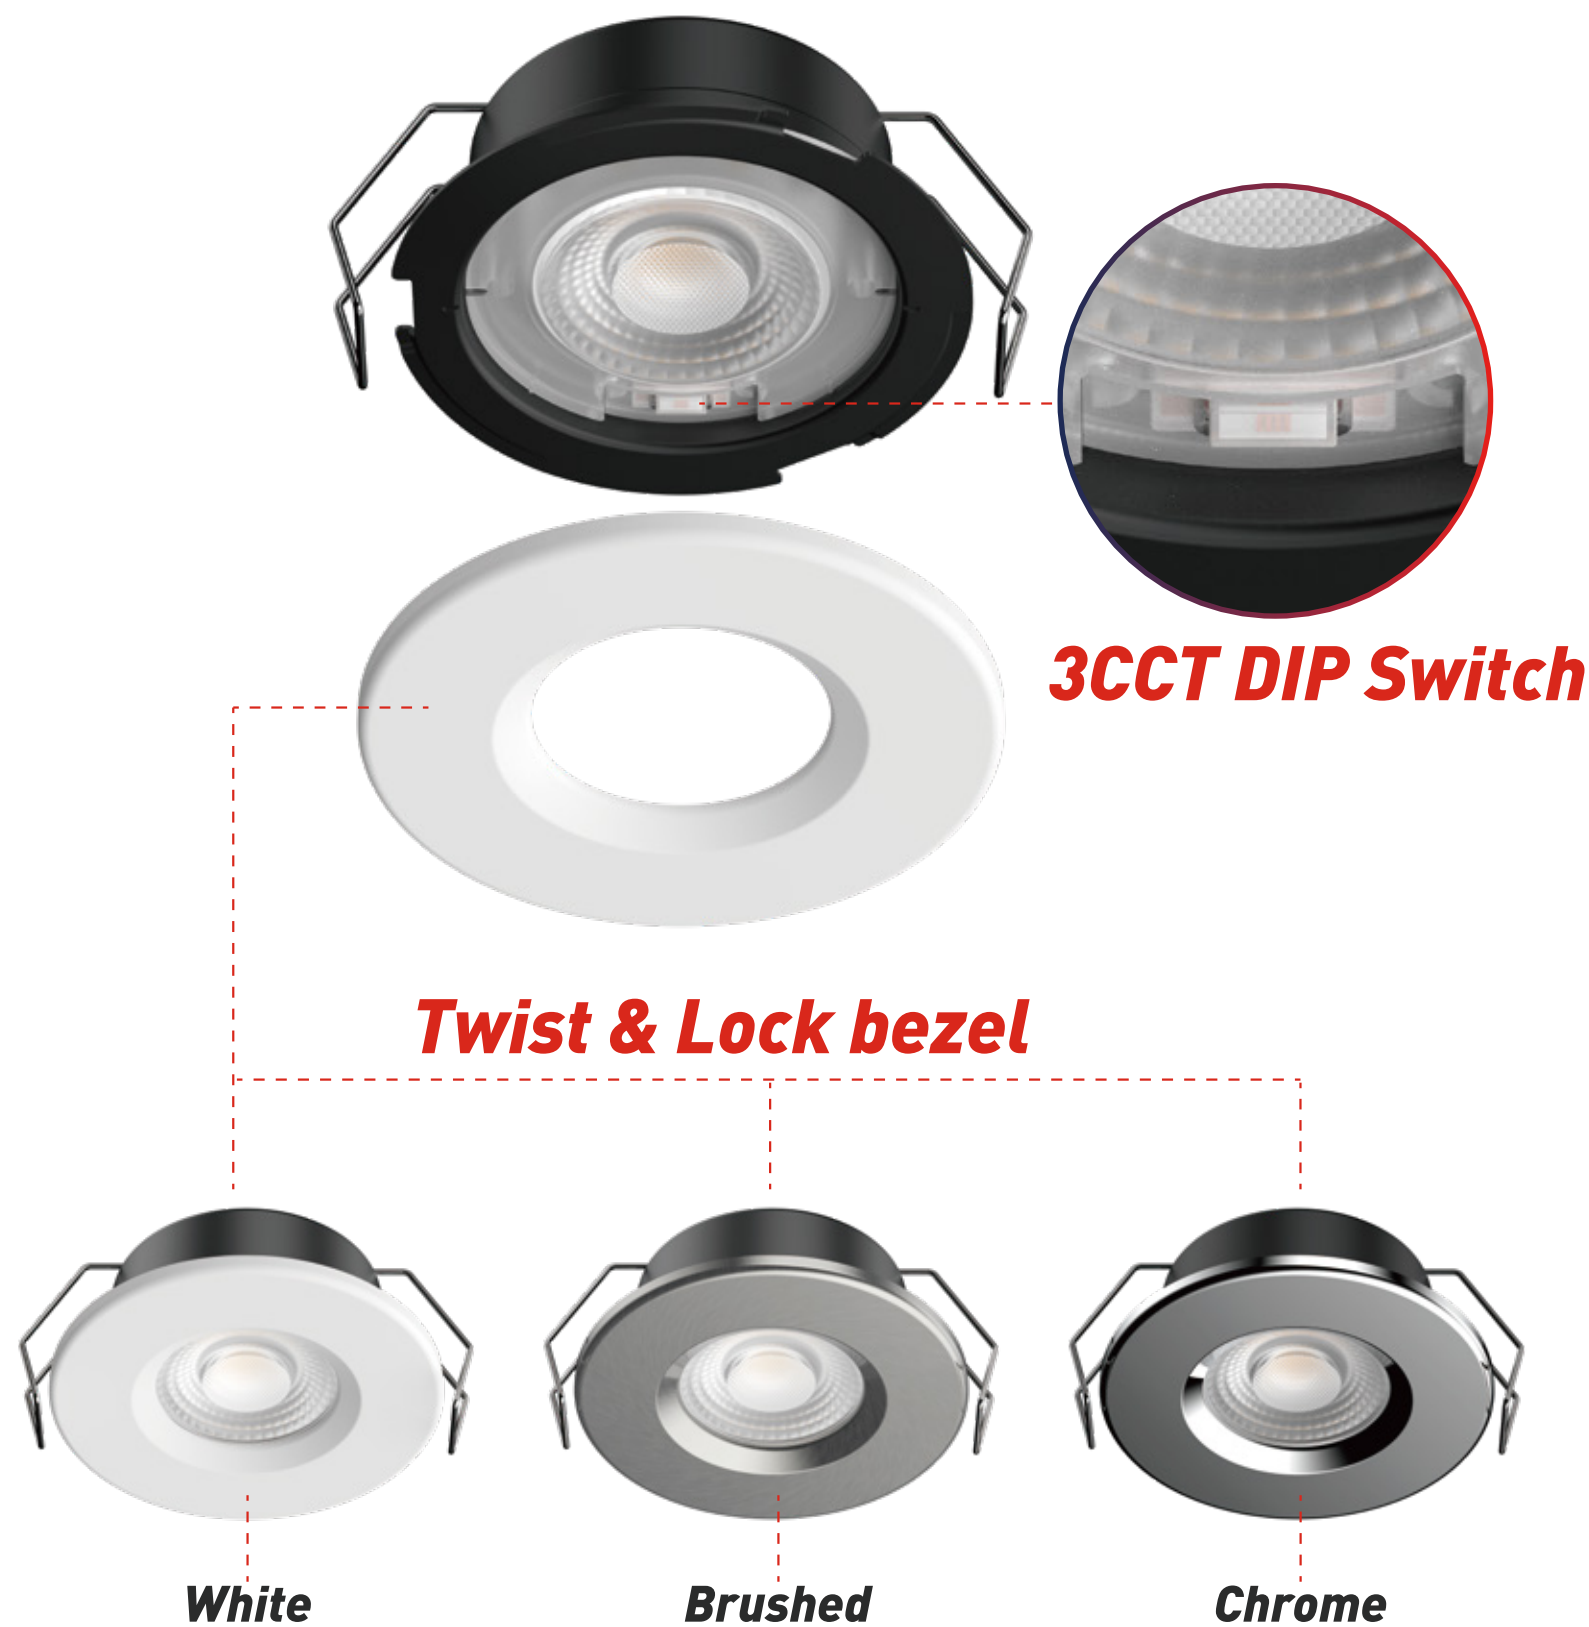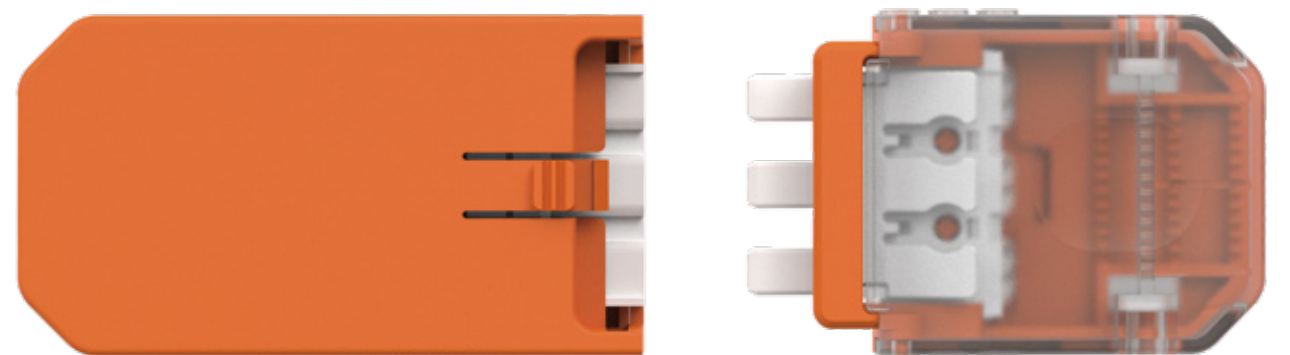

Key Features:

- ▲ Part L1 & L2 compliance: Part B, C, E
- ▲ Fire rated for 30, 60 & 90 minute ceilings
- ▲ Compliant Solid timber & I-Joist building
- ▲ Speed fit tool free loop in/loop out terminals - N E L x 2
- ▲ CCT change from Front bezel
- ▲ Twist & lock bezels included: matt white/ polished chrome/brushed chrome
- ▲ IP65 front/IP20 back, Bathroom Zone 1 & Zone 2
- ▲ Comply with dimmer brand V-pro, MK, Aurora, Halmiton, VOKIS, Legrand, Hager.....
- ▲ Ceiling depth=20mm
- ▲ Can be covered blanket & blown type insulation material
- ▲ High lumen efficiency up to 100lm/W+

Item	ECO 6W Downlight	PF	0.9
Part No.	5RS114-1	IP	IP65 Front
Power	6W	Cut Out	Φ 65-70mm
CCT	3000K/4000K/6000K	Lumen efficiency	100 lm/W+
Lumen	600 lm	Dimmable	Trailing & Leading Edge
Input	AC 220-240V-50Hz	Size	Drawing Supplied
CRI	80	LED	SMD
Beam Angle	40°	Switch Cycles	100,000
Lifespan	50,000hrs	Insulation Coverable	YES
House Material	Steel	Standard	CE/ROHS/Erp 2021

