
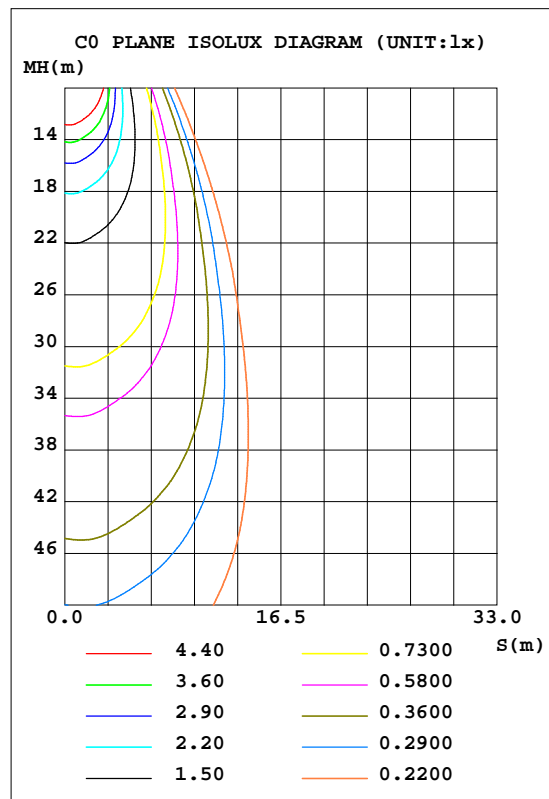


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 97.66 lm/W
MODEL	5RS067-3000K	I _{max} (cd)	739.3	S/MH(C0/180)	0.67	
NOMINAL POWER(W)	4	LOR(%)	100.0	S/MH(C90/270)	0.58	
RATED VOLTAGE(V)	232	TOTAL FLUX(lm)	397.70	h UP, DN(C0-180)	0.0, 47.7	
NOMINAL FLUX(lm)	397.702	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0, 52.3	
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	231.4	h down(%)	100.0	CIBSE SHR MAX	0.65	

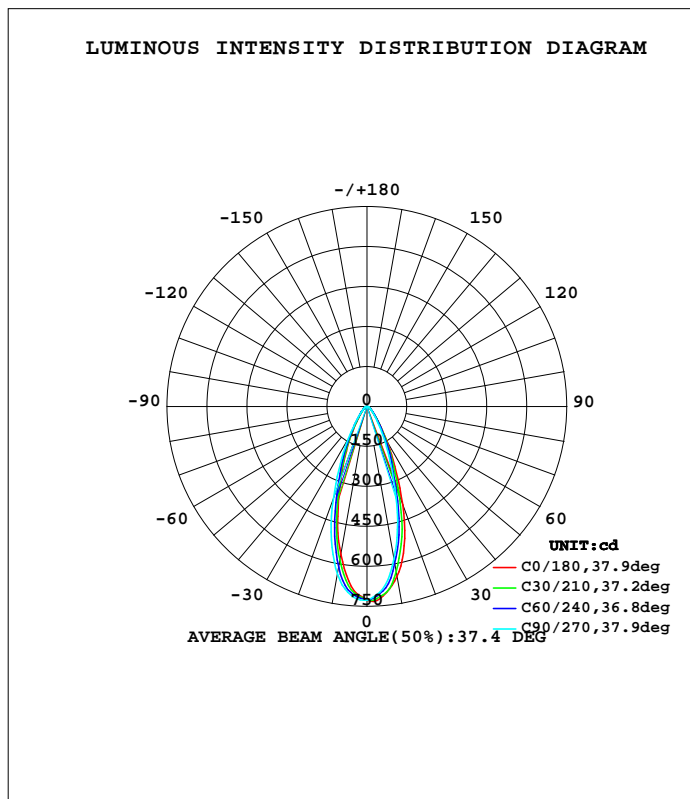

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

deg Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	648.4	612.2	581.4	547.5	566.2	598.4	638.8	661.8	0- 10	63.67	63.67	16,16
20	393.0	331.1	294.6	263.5	285.0	305.2	371.6	391.0	10- 20	129.8	193.5	48.7,48.7
30	149.5	139.1	111.7	103.3	110.1	120.6	142.2	164.9	20- 30	98.69	292.2	73.5,73.5
40	49.03	52.28	42.94	42.64	40.82	46.42	46.99	59.32	30- 40	49.78	342.0	86,86
50	22.72	24.30	21.37	21.16	19.66	22.02	21.43	27.01	40- 50	25.23	367.2	92.3,92.3
60	13.30	13.47	12.26	11.64	11.15	12.25	12.30	14.45	50- 60	15.13	382.3	96.1,96.1
70	7.739	7.703	6.423	6.034	5.798	7.006	7.125	8.323	60- 70	9.559	391.9	98.5,98.5
80	3.051	2.609	1.733	1.355	1.498	2.255	2.692	3.598	70- 80	4.804	396.7	99.7,99.7
90	0.1239	0	0	0	0	0	0.0247	0.2524	80- 90	1.025	397.7	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.02	.98	.95	1.01	.97	.94	.97	.94	.92	.94	.92	.90	.92	.90	.88	.86
3.0	.96	.91	.86	.94	.90	.86	.92	.88	.84	.89	.86	.83	.87	.84	.82	.80
4.0	.90	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.84	.78	.74	.83	.78	.74	.81	.77	.73	.80	.76	.72	.78	.75	.72	.70
6.0	.79	.74	.69	.79	.73	.69	.77	.72	.69	.76	.71	.68	.74	.71	.68	.66
7.0	.75	.69	.65	.75	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.63
8.0	.71	.66	.62	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
9.0	.68	.62	.58	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.56
10.0	.65	.59	.56	.64	.59	.55	.64	.59	.55	.63	.58	.55	.62	.58	.55	.54

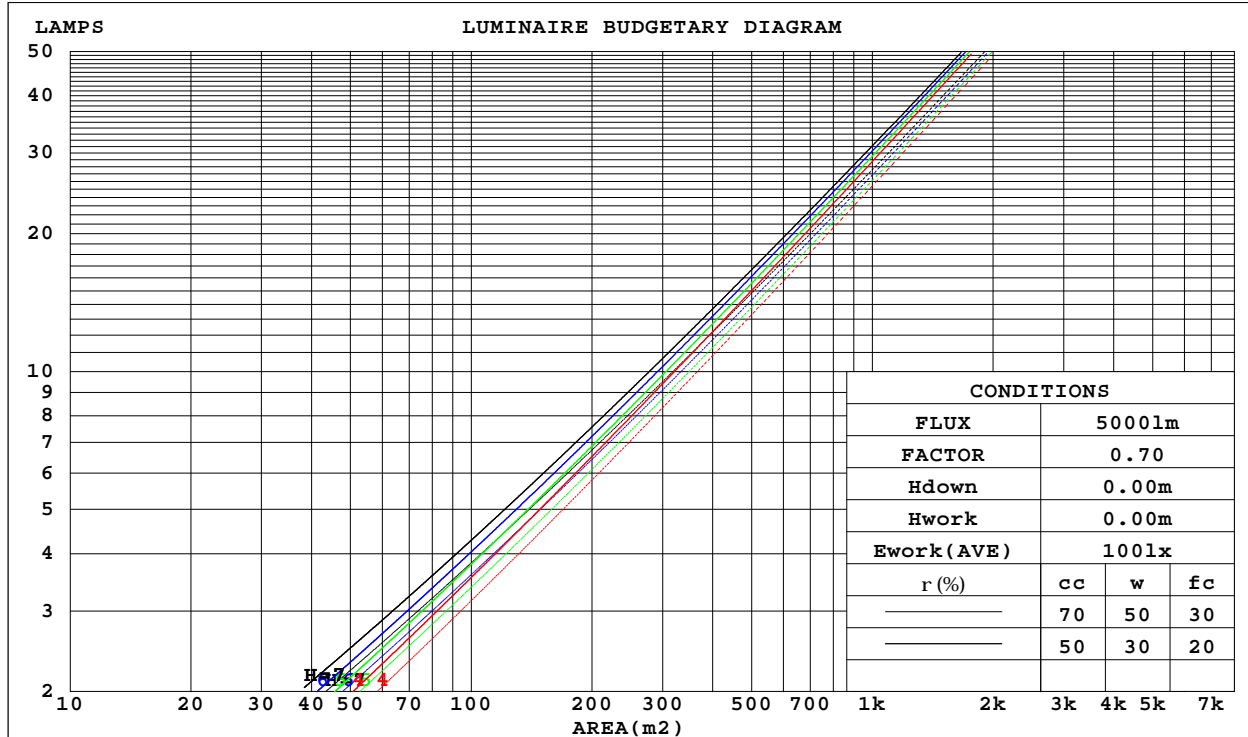

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

rcc	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.186	.106	.034	.179	.102	.032	.167	.096	.031	.155	.089	.029	.144	.084	.027	
2.0	.176	.097	.030	.171	.094	.029	.160	.089	.028	.150	.084	.026	.141	.080	.025	
3.0	.166	.088	.026	.161	.086	.026	.152	.082	.025	.144	.079	.024	.136	.075	.023	
4.0	.156	.081	.024	.152	.080	.024	.144	.077	.023	.137	.074	.022	.130	.071	.022	
5.0	.148	.075	.022	.144	.074	.022	.137	.071	.021	.131	.069	.021	.125	.067	.020	
6.0	.140	.070	.020	.136	.069	.020	.131	.067	.019	.125	.065	.019	.120	.063	.019	
7.0	.132	.065	.019	.130	.065	.018	.124	.063	.018	.119	.061	.018	.115	.060	.018	
8.0	.126	.062	.017	.123	.061	.017	.119	.059	.017	.114	.058	.017	.110	.057	.016	
9.0	.120	.058	.016	.118	.057	.016	.114	.056	.016	.110	.055	.016	.106	.054	.016	
10.0	.115	.055	.015	.113	.054	.015	.109	.053	.015	.105	.052	.015	.102	.051	.015	

rcc	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.125	.087	.059	.107	.076	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.101	.068	.043	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.095	.061	.037	.066	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.104	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004	
9.0	.099	.059	.032	.085	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.094	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

Uncorrected UGR Table

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm										
NAME: 5RS067-3000K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:001		
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.6	21.5	20.8	21.7	21.9	20.4	21.3	20.6	21.5	21.7
3H	21.3	22.2	21.6	22.4	22.6	21.0	21.9	21.3	22.1	22.3
4H	21.6	22.5	21.9	22.7	22.9	21.2	22.1	21.5	22.3	22.5
6H	21.9	22.6	22.2	22.9	23.1	21.3	22.1	21.6	22.3	22.6
8H	21.9	22.7	22.2	22.9	23.2	21.3	22.0	21.6	22.3	22.6
12H	22.0	22.7	22.3	23.0	23.2	21.3	22.0	21.6	22.3	22.5
4H 2H	20.8	21.7	21.1	21.9	22.1	20.7	21.5	21.0	21.7	22.0
3H	21.8	22.5	22.1	22.8	23.0	21.6	22.3	21.9	22.6	22.8
4H	22.2	22.8	22.5	23.1	23.5	21.9	22.5	22.2	22.8	23.1
6H	22.5	23.1	22.9	23.4	23.8	22.0	22.6	22.4	22.9	23.3
8H	22.6	23.1	23.0	23.5	23.9	22.0	22.5	22.4	22.9	23.3
12H	22.7	23.2	23.1	23.5	23.9	22.0	22.5	22.4	22.9	23.2
8H 4H	22.3	22.8	22.7	23.2	23.6	22.0	22.5	22.4	22.9	23.3
6H	22.7	23.1	23.1	23.5	23.9	22.2	22.7	22.6	23.0	23.5
8H	22.8	23.2	23.3	23.6	24.1	22.2	22.6	22.7	23.1	23.5
12H	22.9	23.3	23.4	23.7	24.2	22.2	22.6	22.7	23.0	23.5
12H 4H	22.3	22.8	22.7	23.1	23.5	22.0	22.5	22.4	22.8	23.2
6H	22.7	23.1	23.1	23.5	23.9	22.2	22.6	22.7	23.0	23.5
8H	22.8	23.2	23.3	23.6	24.1	22.3	22.6	22.7	23.0	23.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 0.8					+ 0.7 / - 0.9				
1.5H	+ 1.3 / - 0.6					+ 1.0 / - 0.8				
2.0H	+ 0.9 / - 0.5					+ 1.1 / - 1.0				

CIE Pub.117 Corrected 397.7 lm Total Lamp Luminous Flux.(8log(F/F0) = -3.2)

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	83	76	71	82	76	71	81	75	71	67
0.80	91	84	80	90	84	80	89	83	79	75
1.00	96	89	85	95	89	85	93	89	84	80
1.25	100	94	90	99	94	90	97	92	89	84
1.50	103	98	94	102	97	93	100	96	92	87
2.00	107	102	98	105	101	97	102	99	96	90
2.50	109	104	101	107	103	100	104	101	98	92
3.00	110	107	103	109	105	102	105	102	100	93
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	109	112	110	108	108	106	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

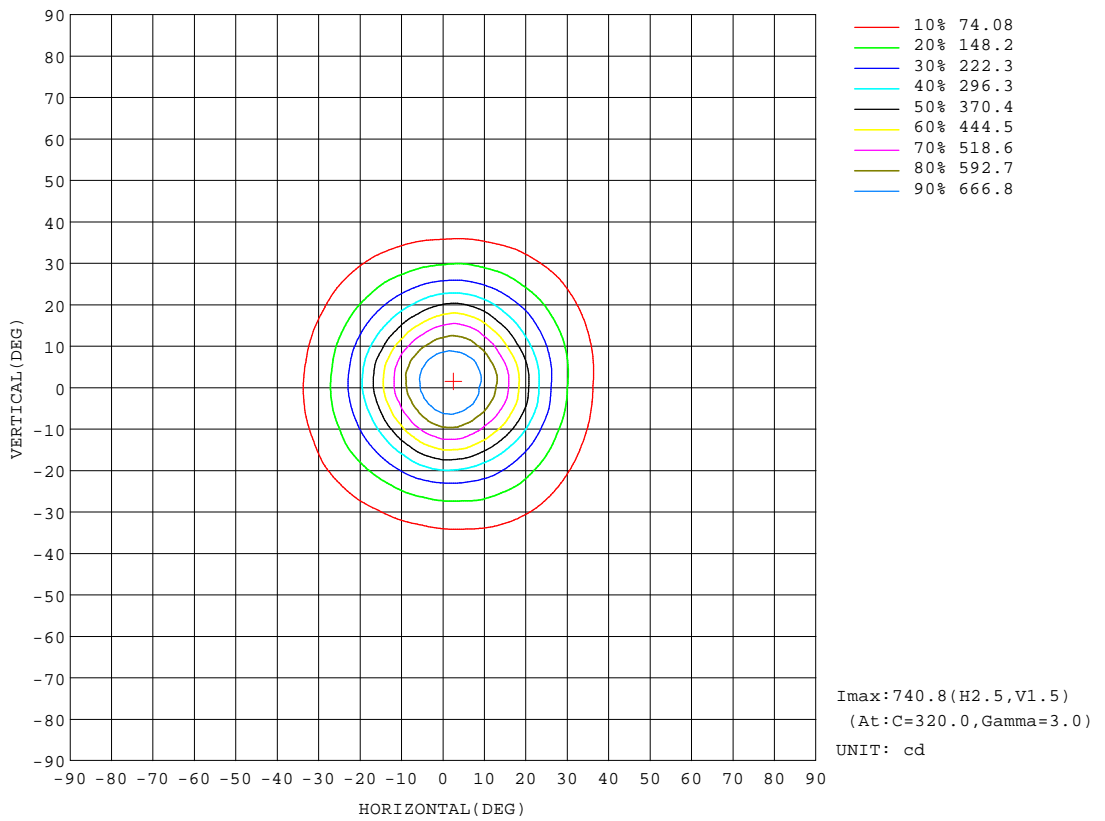


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 01
 Test Date: 2018-02-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity: 65.0%
 Test Distance: 8.989m [K=1.0000]
 Remarks:

AAI Figure

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Flux out:180.9 lm

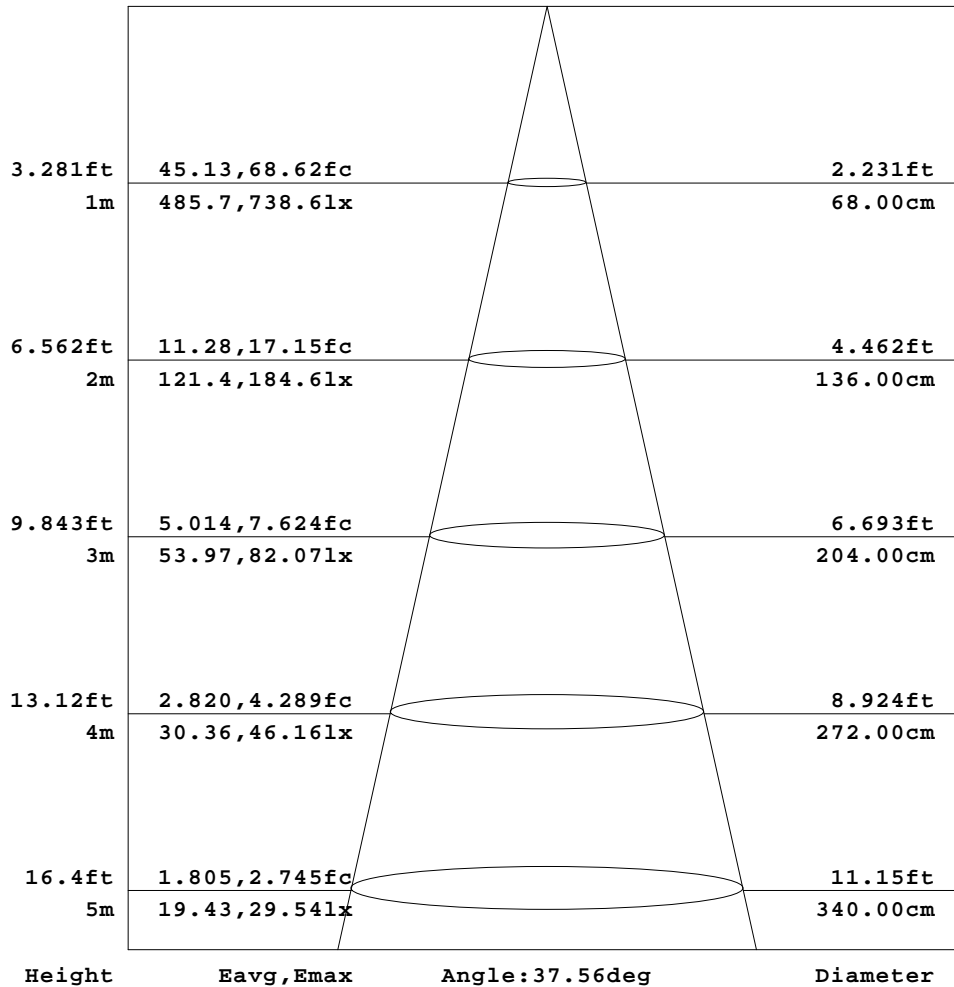


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

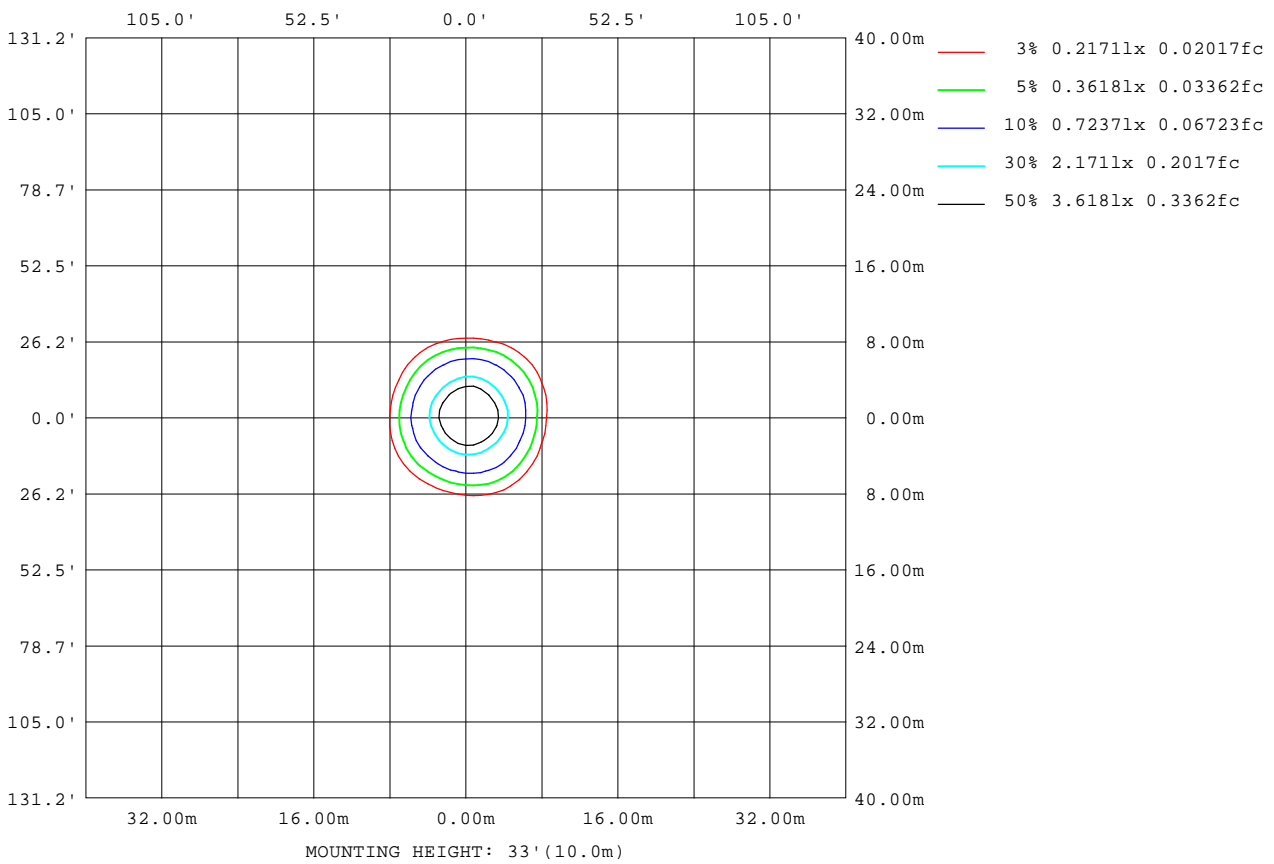

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 01
 Test Date: 2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity: 65.0%
 Test Distance: 8.989m [K=1.0000]
 Remarks:

Planar Illuminance Curve

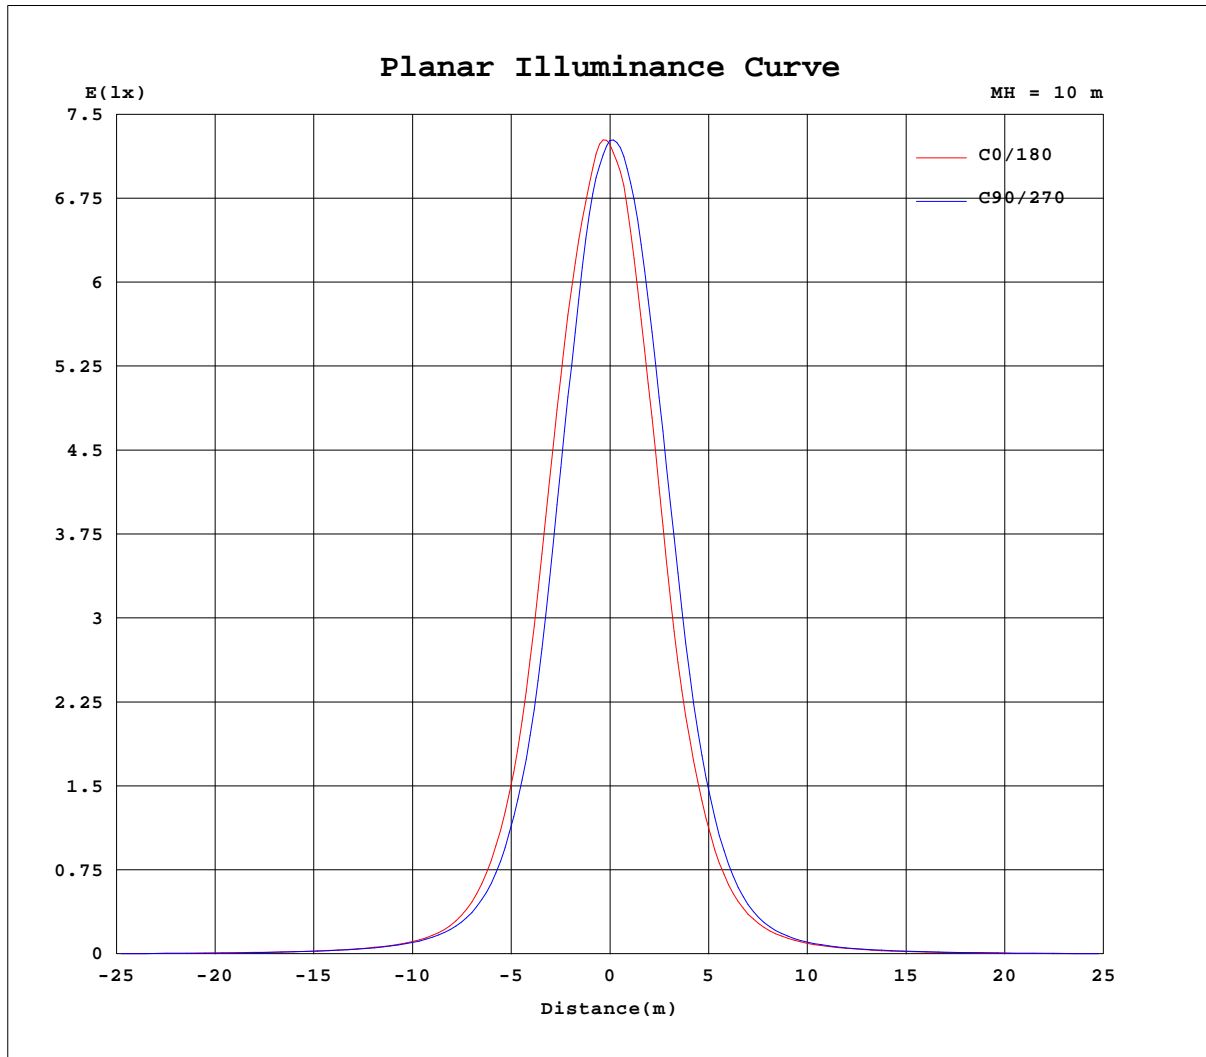

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: 01
 Test Date: 2018-02-06

Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity: 65.0%
 Test Distance: 8.989m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726
5	713	714	710	709	702	699	695	692	688	687	682	679	673	672	668	669	667	672	678
10	648	648	638	630	615	610	600	598	587	581	570	564	554	550	545	547	547	556	566
15	542	538	518	506	487	479	468	465	452	445	431	423	410	406	400	403	402	413	426
20	393	392	372	355	338	324	314	306	299	295	287	278	269	265	262	263	266	273	285
25	248	248	235	229	220	215	211	203	193	186	180	178	174	173	175	178	176	180	184
30	149	148	142	142	140	139	132	127	117	112	107	104	102	103	104	107	105	108	110
35	84.9	84.1	82.1	82.0	82.5	82.7	80.3	76.6	70.9	67.6	63.7	62.9	62.1	64.2	64.9	66.1	64.4	64.9	65.2
40	49.0	49.0	48.8	50.5	51.8	52.8	51.8	49.3	45.6	42.9	40.4	40.2	40.7	42.3	42.9	43.4	42.1	41.5	40.8
45	31.8	31.6	31.6	33.0	34.2	35.3	35.2	33.6	31.2	29.3	27.9	27.8	28.2	29.3	29.6	29.6	28.7	27.8	27.3
50	22.7	22.3	22.4	23.3	23.9	24.7	24.7	23.9	22.5	21.4	20.5	20.4	20.6	21.1	21.2	21.1	20.5	19.9	19.7
55	17.2	16.9	16.9	17.3	17.5	18.0	18.0	17.6	16.7	16.2	15.5	15.4	15.4	15.6	15.6	15.5	15.1	14.8	14.7
60	13.3	13.1	13.0	13.2	13.3	13.6	13.6	13.2	12.6	12.3	11.8	11.6	11.6	11.7	11.6	11.6	11.4	11.2	11.1
65	10.3	10.1	10.0	10.1	10.1	10.4	10.5	10.2	9.44	9.10	8.79	8.65	8.53	8.67	8.76	8.81	8.49	8.26	8.31
70	7.74	7.65	7.50	7.50	7.56	7.85	7.96	7.57	6.78	6.42	6.13	5.98	5.84	5.96	6.11	6.22	5.92	5.70	5.80
75	5.42	5.30	5.09	5.02	4.93	5.06	4.95	4.55	3.96	3.61	3.37	3.27	3.17	3.25	3.33	3.36	3.22	3.14	3.23
80	3.05	2.97	2.77	2.69	2.60	2.62	2.47	2.22	1.90	1.73	1.61	1.53	1.43	1.38	1.33	1.32	1.32	1.37	1.50
85	1.43	1.35	1.26	1.15	1.04	0.90	0.75	0.60	0.50	0.37	0.26	0.16	0.13	0.07	0.08	0.04	0.08	0.07	0.19
90	0.12	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:231.5V I:0.0219A P:4.072W PF:0.8030 Lamp Flux:397.702x1 lm		
NAME: 5RS067-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726	726		
5	681	686	689	694	696	701	703	708	709	715	717	723	724	728	726	725	720		
10	570	583	587	597	600	612	617	632	639	649	653	659	659	665	659	658	655		
15	433	443	443	453	457	472	483	503	518	536	541	546	540	546	541	547	546		
20	289	295	298	303	308	320	331	352	372	390	392	396	388	394	389	399	399		
25	186	191	196	201	206	213	219	229	238	248	253	258	257	259	257	257	256		
30	110	112	113	119	122	129	131	137	142	151	154	162	162	168	165	165	158		
35	64.2	65.6	66.7	70.7	73.2	76.1	77.0	79.6	80.2	85.1	87.9	92.6	93.9	96.0	94.8	94.0	90.3		
40	39.7	40.8	42.4	45.5	47.3	48.4	48.4	47.8	47.0	49.0	51.6	56.9	58.3	60.4	58.7	56.5	53.3		
45	26.7	27.6	28.7	30.8	31.7	32.6	31.9	31.1	30.4	31.2	33.2	36.6	38.7	40.5	39.3	37.1	34.8		
50	19.5	20.0	20.7	21.8	22.2	22.7	22.3	21.9	21.4	21.9	23.0	24.9	26.4	27.6	27.2	26.1	24.5		
55	14.6	15.0	15.4	16.1	16.3	16.6	16.3	16.2	16.1	16.3	17.0	18.1	19.0	19.8	19.7	19.1	18.2		
60	11.1	11.4	11.7	12.1	12.3	12.5	12.3	12.4	12.3	12.6	13.0	13.7	14.2	14.7	14.7	14.5	13.9		
65	8.30	8.52	8.78	9.30	9.43	9.50	9.37	9.49	9.52	9.78	10.0	10.5	10.8	11.2	11.1	11.1	10.7		
70	5.83	6.07	6.39	6.91	7.11	7.11	6.93	7.05	7.13	7.37	7.58	7.94	8.17	8.48	8.47	8.37	8.09		
75	3.29	3.54	3.82	4.31	4.54	4.66	4.57	4.74	4.85	5.13	5.32	5.65	5.93	6.26	6.21	6.05	5.72		
80	1.57	1.71	1.86	2.18	2.33	2.45	2.45	2.59	2.69	2.92	3.01	3.28	3.46	3.74	3.68	3.56	3.31		
85	0.26	0.35	0.44	0.49	0.58	0.75	0.92	1.07	1.19	1.32	1.40	1.50	1.55	1.62	1.63	1.62	1.56		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.14	0.18	0.23	0.27	0.27	0.26	0.24		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:01
 Test Date:2018-02-06

g Range: 0 - 90DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.279
 Humidity:65.0%
 Test Distance:8.989m [K=1.0000]
 Remarks: