
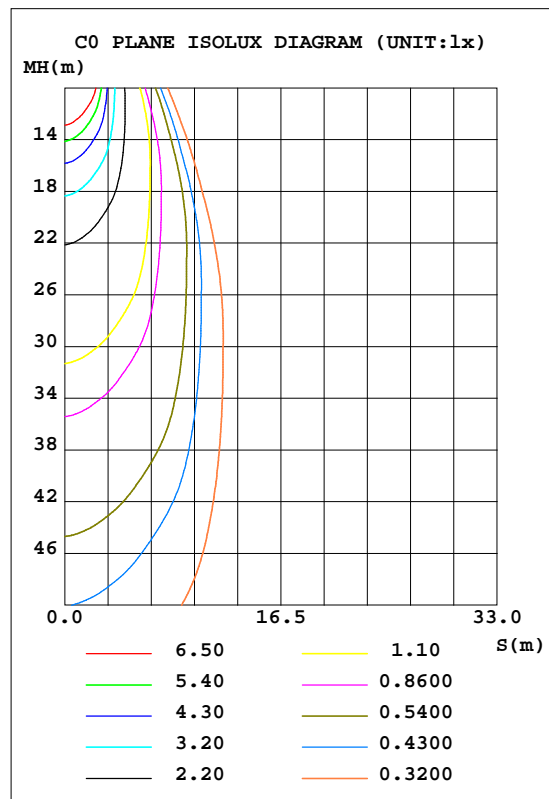


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 103.20 lm/W			
MODEL	5RS063-3000K	I <sub>max</sub> (cd)	1111	S/MH(C0/180)	0.56
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	0.75
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	595.37	h UP, DN(C0-180)	0.0, 59.5
NOMINAL FLUX(lm)	595.366	CIE CLASS	DIRECT	h UP, DN(C180-360)	0.0, 40.5
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	230.6	h down(%)	100.0	CIBSE SHR MAX	0.65

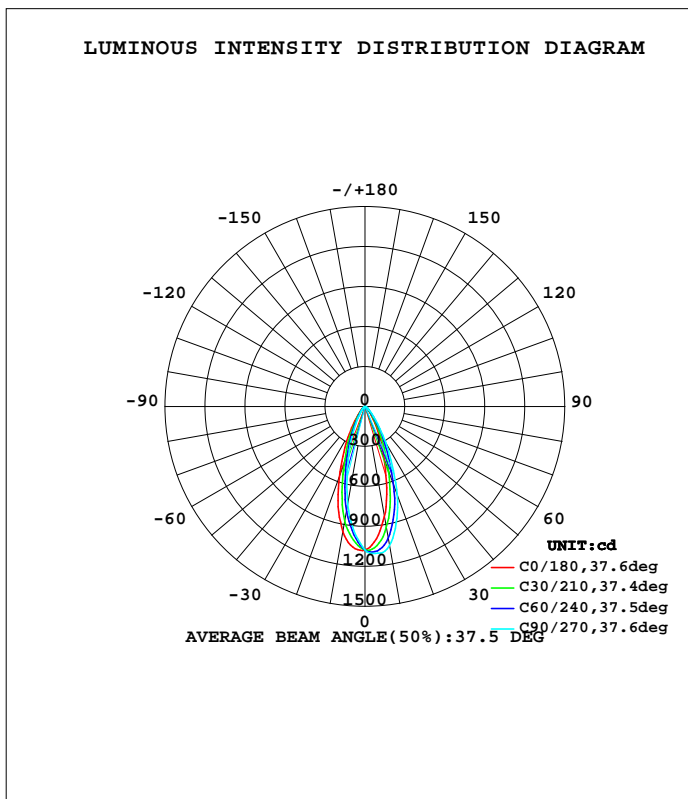

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

deg Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	841.3	960.8	1061	1052	953.8	838.1	750.0	759.3	0- 10	94.05	94.05	15.8,15.8
20	422.5	572.4	711.6	694.5	565.5	417.7	346.4	354.2	10- 20	195.4	289.4	48.6,48.6
30	164.9	245.6	312.9	307.9	238.6	167.5	121.1	122.6	20- 30	155.9	445.3	74.8,74.8
40	53.60	81.27	103.8	102.6	76.52	56.08	41.81	42.45	30- 40	78.45	523.7	88,88
50	23.44	31.00	37.06	37.78	29.97	24.79	20.40	20.64	40- 50	34.08	557.8	93.7,93.7
60	13.39	16.73	18.83	18.90	16.47	14.61	11.39	11.48	50- 60	18.56	576.4	96.8,96.8
70	7.633	9.822	10.46	10.62	9.999	8.259	5.765	5.594	60- 70	11.51	587.9	98.7,98.7
80	2.204	3.952	4.855	4.944	3.739	2.153	1.299	1.303	70- 80	5.977	593.9	99.7,99.7
90	0	0.2190	0.9207	0.8525	0.1726	0.0062	0.0062	0	80- 90	1.494	595.4	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

r <sub>cc</sub>	80%			70%			50%			30%			10%			0
r <sub>w</sub>	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r <sub>fc</sub>	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.87
3.0	.96	.91	.87	.95	.90	.86	.92	.88	.85	.90	.86	.84	.87	.85	.82	.81
4.0	.90	.85	.80	.89	.84	.80	.87	.82	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.79	.75	.82	.77	.74	.80	.76	.73	.79	.75	.73	.71
6.0	.80	.74	.70	.79	.74	.70	.78	.73	.69	.76	.72	.69	.75	.71	.68	.67
7.0	.76	.70	.66	.75	.70	.66	.74	.69	.65	.73	.68	.65	.72	.68	.65	.63
8.0	.72	.66	.62	.71	.66	.62	.70	.65	.62	.69	.65	.62	.68	.64	.61	.60
9.0	.68	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.59	.65	.61	.58	.57
10.0	.65	.60	.56	.65	.60	.56	.64	.59	.56	.63	.59	.56	.63	.59	.56	.54

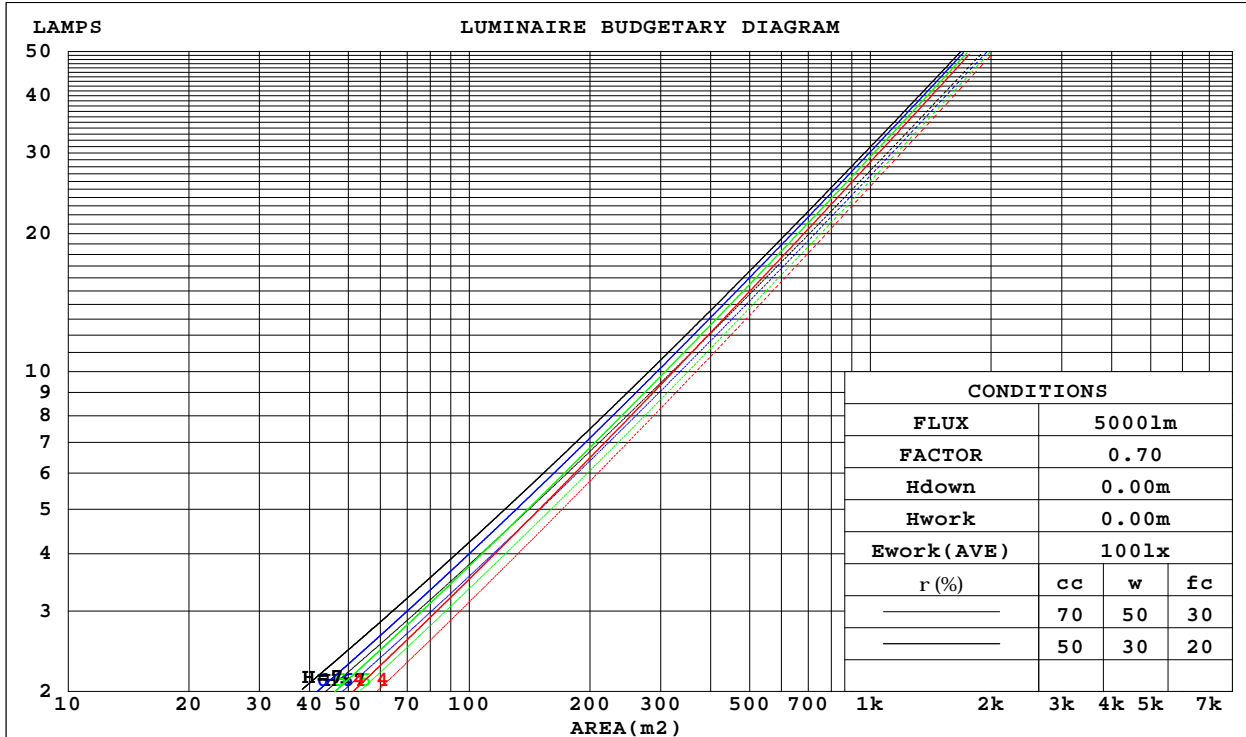

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

WEC AND CCEC

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.183	.104	.033	.176	.100	.032	.163	.094	.030	.152	.087	.028	.141	.082	.026	
2.0	.173	.095	.029	.167	.092	.028	.157	.087	.027	.147	.082	.026	.138	.078	.025	
3.0	.163	.087	.026	.158	.085	.026	.149	.081	.025	.141	.077	.024	.133	.074	.023	
4.0	.154	.080	.023	.150	.078	.023	.142	.075	.022	.135	.072	.022	.128	.069	.021	
5.0	.145	.074	.021	.142	.073	.021	.135	.070	.021	.129	.068	.020	.123	.066	.020	
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018	
7.0	.131	.065	.018	.128	.064	.018	.123	.062	.018	.118	.060	.018	.113	.059	.017	
8.0	.124	.061	.017	.122	.060	.017	.117	.059	.017	.113	.057	.017	.109	.056	.016	
9.0	.119	.057	.016	.117	.057	.016	.112	.056	.016	.108	.054	.016	.105	.053	.015	
10.0	.114	.054	.015	.112	.054	.015	.108	.053	.015	.104	.052	.015	.101	.051	.015	

rcc	80%			70%			50%			30%			10%			0
r w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r f c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.156	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.144	.114	.089	.123	.098	.078	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.133	.099	.073	.114	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.124	.087	.060	.107	.075	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.094	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.104	.064	.037	.089	.055	.032	.062	.039	.023	.036	.023	.013	.012	.008	.004	
9.0	.098	.059	.032	.085	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.094	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

Uncorrected UGR Table

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm										
NAME: 5RS063-3000K					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:001		
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	20.5	21.4	20.7	21.6	21.8	22.9	23.9	23.2	24.0	24.2
3H	21.0	21.8	21.2	22.0	22.2	23.4	24.2	23.6	24.4	24.6
4H	21.2	22.0	21.4	22.2	22.4	23.6	24.4	23.9	24.6	24.8
6H	21.2	22.0	21.5	22.2	22.5	23.8	24.5	24.1	24.8	25.0
8H	21.2	22.0	21.5	22.2	22.5	23.8	24.6	24.1	24.8	25.1
12H	21.2	21.9	21.5	22.2	22.5	23.9	24.6	24.2	24.9	25.1
4H 2H	20.8	21.6	21.1	21.8	22.0	23.0	23.8	23.2	24.0	24.2
3H	21.5	22.2	21.8	22.4	22.7	23.6	24.3	23.9	24.6	24.8
4H	21.7	22.4	22.1	22.7	23.0	23.9	24.6	24.3	24.9	25.2
6H	21.9	22.4	22.2	22.8	23.1	24.2	24.8	24.6	25.1	25.5
8H	21.9	22.4	22.3	22.8	23.1	24.3	24.9	24.7	25.2	25.6
12H	21.9	22.4	22.3	22.7	23.1	24.4	24.9	24.8	25.3	25.7
8H 4H	21.9	22.5	22.3	22.8	23.2	24.0	24.5	24.4	24.9	25.2
6H	22.2	22.6	22.6	23.0	23.4	24.4	24.8	24.8	25.2	25.6
8H	22.2	22.6	22.7	23.0	23.5	24.6	24.9	25.0	25.4	25.8
12H	22.2	22.6	22.7	23.0	23.5	24.7	25.1	25.2	25.5	26.0
12H 4H	21.9	22.4	22.3	22.8	23.2	23.9	24.4	24.3	24.8	25.2
6H	22.2	22.6	22.7	23.0	23.5	24.4	24.8	24.8	25.2	25.6
8H	22.3	22.6	22.8	23.1	23.5	24.6	24.9	25.0	25.3	25.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.8 / - 1.1					+ 1.3 / - 1.3				
1.5H	+ 1.2 / - 1.0					+ 2.5 / - 1.2				
2.0H	+ 1.0 / - 0.9					+ 1.9 / - 0.8				

CIE Pub.117 Corrected 595.4 lm Total Lamp Luminous Flux.(8log(F/F0) = -1.8)

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	84	77	73	84	77	73	83	77	73	69
0.80	92	85	81	91	85	81	90	84	81	77
1.00	97	91	86	96	90	86	94	90	86	81
1.25	101	95	91	100	95	91	98	93	90	86
1.50	104	99	95	103	98	94	100	96	93	89
2.00	107	102	99	106	101	98	103	99	97	91
2.50	109	105	101	107	104	101	104	101	99	93
3.00	111	107	104	109	106	103	105	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

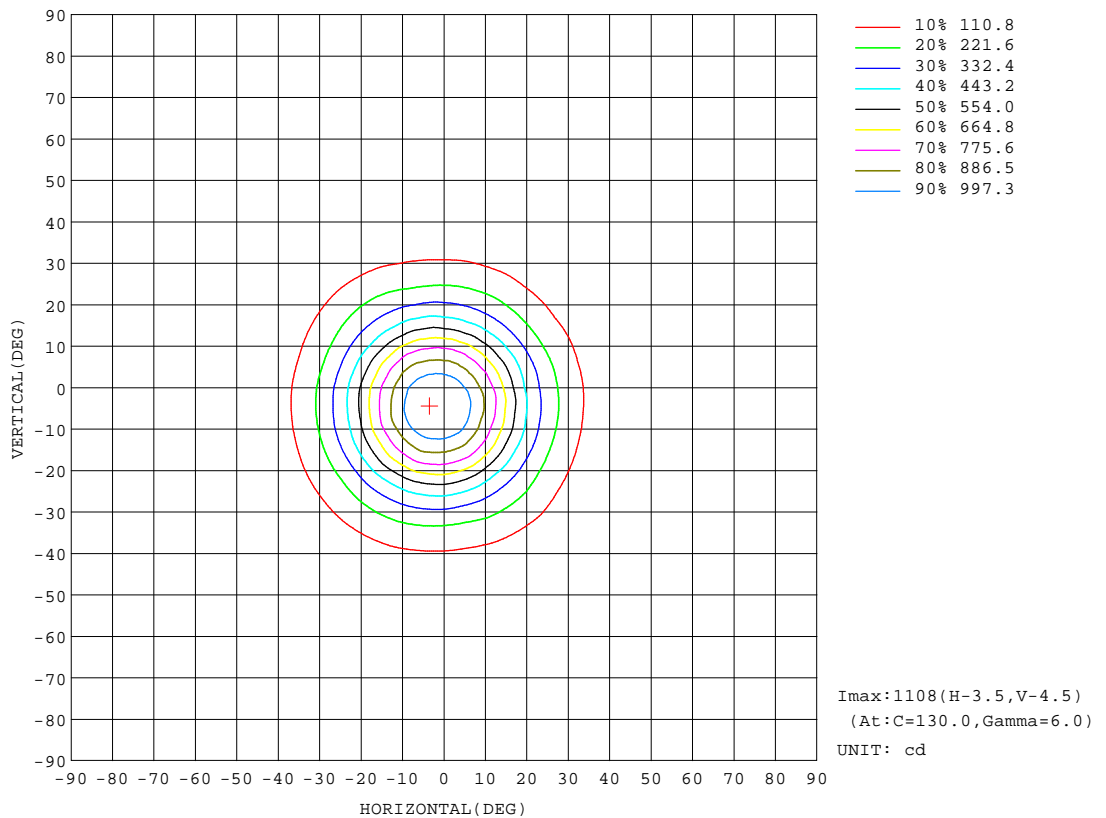


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

AAI Figure

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Flux out:270.0 lm

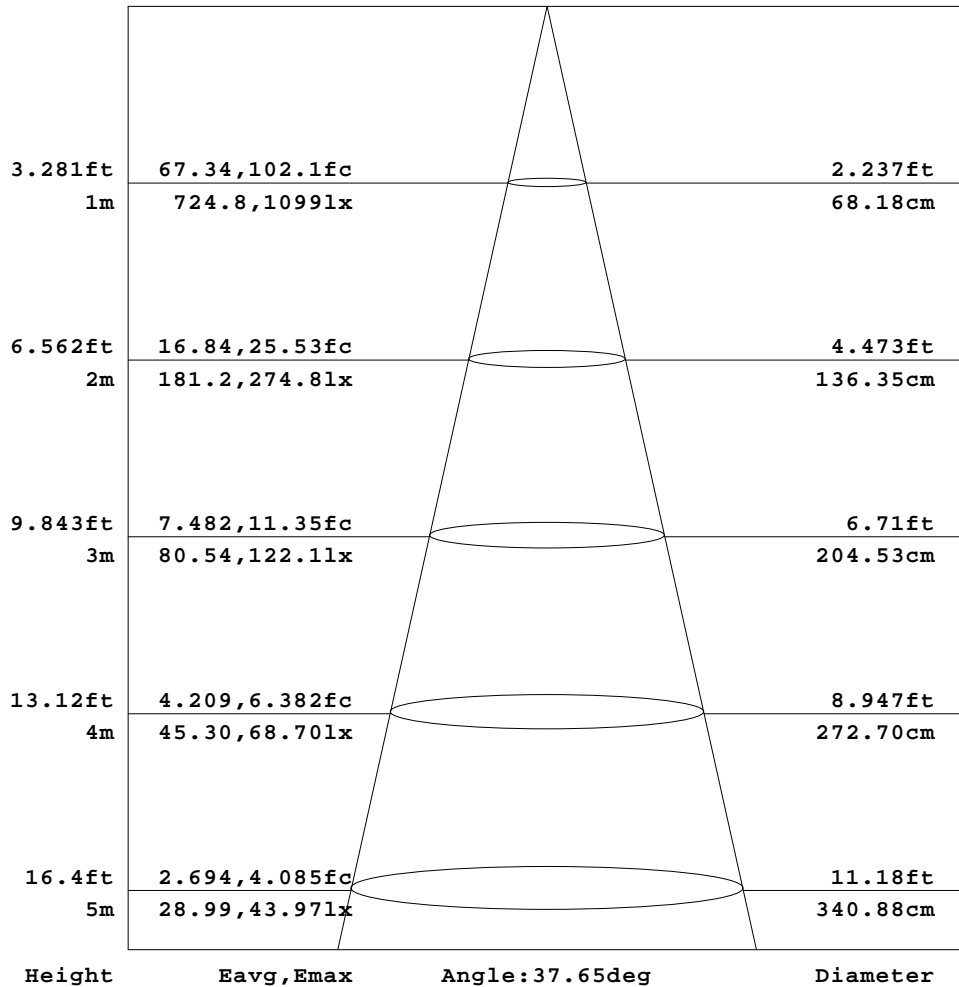

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:



ISOLUX DIAGRAM


Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

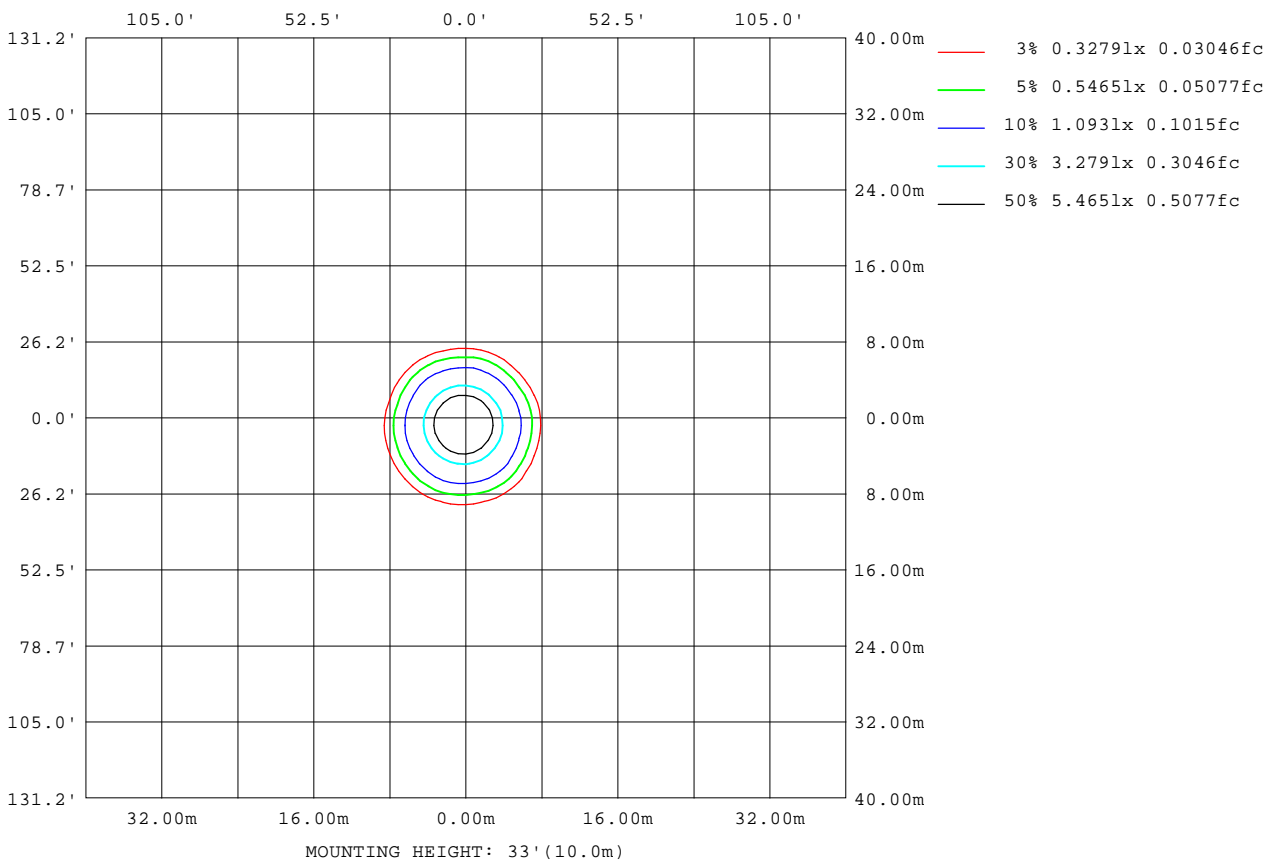

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: 01  
 Test Date: 2017-11-16

Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity: 65.0%  
 Test Distance: 8.989m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

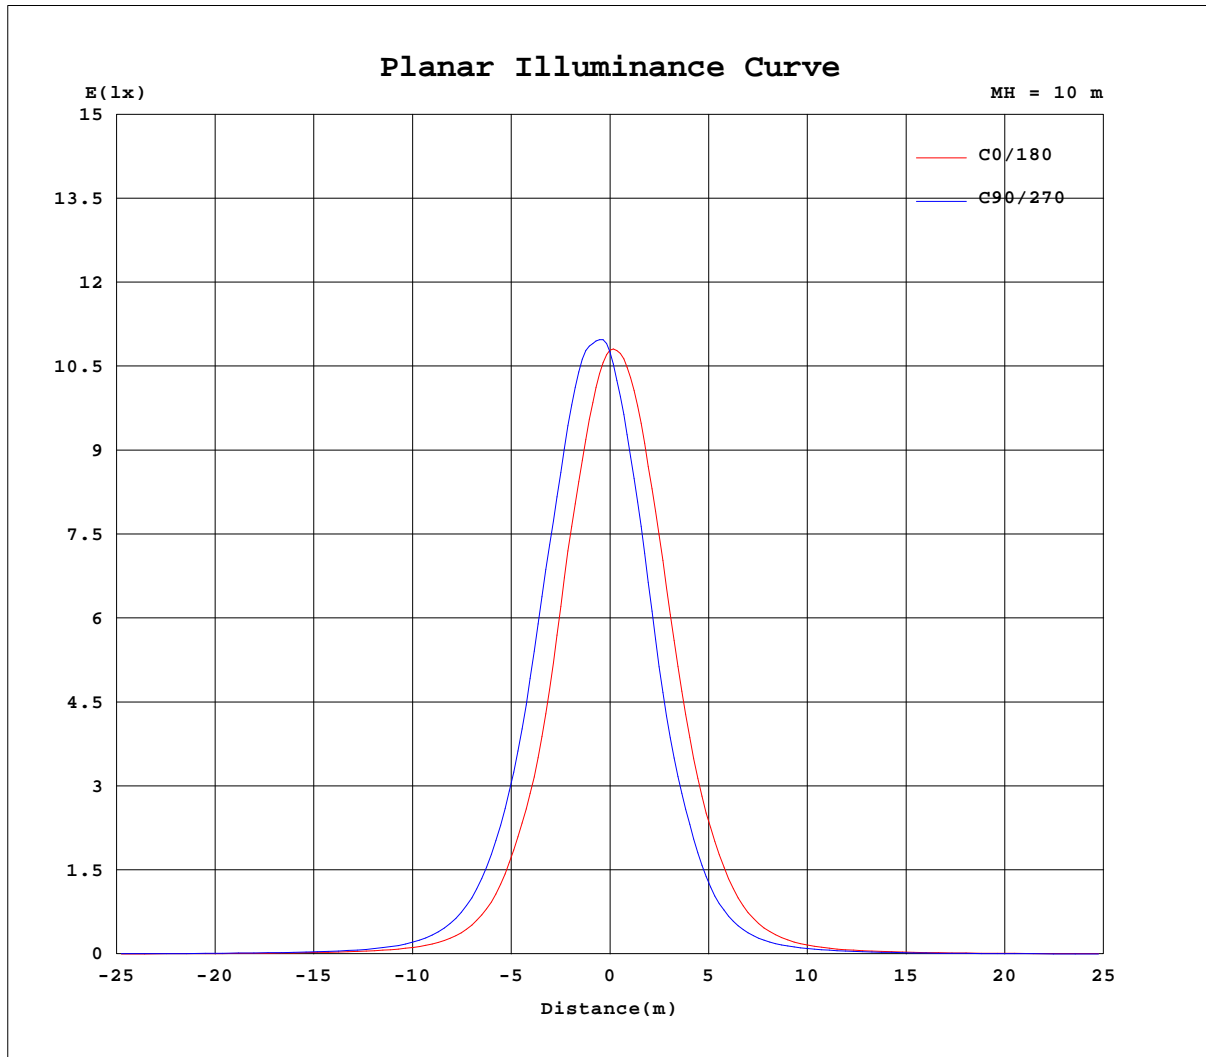

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: 01  
 Test Date: 2017-11-16

deg Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity: 65.0%  
 Test Distance: 8.989m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Table--1 UNIT: cd

C( DEG) g (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077
5	995	1014	1028	1047	1061	1077	1087	1099	1101	1105	1102	1105	1105	1109	1106	1101	1087	1072	1059
10	841	873	894	922	943	978	1006	1036	1045	1061	1063	1072	1065	1061	1043	1029	1001	976	954
15	631	672	698	738	768	813	840	877	891	907	917	932	919	909	890	877	841	809	779
20	422	458	482	521	551	594	628	671	689	712	718	733	717	710	679	661	622	593	565
25	281	301	320	344	365	397	417	447	466	488	493	500	492	491	470	453	423	401	379
30	165	180	192	209	231	261	277	295	298	313	321	327	322	317	299	289	276	259	239
35	93.8	99.8	108	119	132	154	163	176	175	183	190	198	194	188	175	166	155	146	134
40	53.6	56.7	60.4	67.0	74.5	88.0	93.2	98.8	99.6	104	107	111	109	106	99.4	94.2	88.5	83.3	76.5
45	33.3	35.6	37.2	40.5	44.5	50.8	54.4	56.9	58.3	60.1	62.2	63.6	63.3	61.3	58.3	55.6	51.9	49.3	45.4
50	23.4	24.7	26.0	27.6	29.7	32.3	34.7	35.8	36.2	37.1	38.0	39.1	39.3	38.5	37.1	36.2	33.6	31.9	30.0
55	17.5	18.5	19.3	20.5	21.5	23.2	24.1	24.8	25.1	25.6	26.0	26.8	26.9	26.4	25.7	25.5	23.9	23.1	21.9
60	13.4	13.9	14.5	15.3	16.1	17.4	18.0	18.3	18.5	18.8	19.1	19.5	19.5	19.2	18.6	18.6	17.7	17.2	16.5
65	10.4	10.5	10.7	11.4	12.2	13.3	13.4	13.6	13.8	14.1	14.3	14.7	14.6	14.2	13.9	13.9	13.6	13.5	12.9
70	7.63	7.66	7.66	8.34	9.23	10.4	10.7	10.4	10.2	10.5	10.9	11.8	11.6	11.0	10.3	10.1	10.5	10.6	10.00
75	4.55	4.76	4.92	5.61	6.54	7.52	7.76	7.71	7.28	7.62	8.23	8.83	8.74	8.25	7.49	7.47	7.55	7.45	7.02
80	2.20	2.46	2.60	3.04	3.65	4.26	4.50	4.65	4.56	4.86	5.19	5.50	5.40	5.20	4.69	4.53	4.25	3.97	3.74
85	0.63	0.85	1.09	1.30	1.52	1.75	2.06	2.35	2.44	2.53	2.66	2.76	2.69	2.60	2.52	2.28	1.94	1.73	1.60
90	0.00	0.00	0.00	0.01	0.15	0.29	0.54	0.69	0.83	0.92	0.99	0.99	0.97	0.90	0.81	0.68	0.50	0.27	0.17

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks:

E:\周磊\老产品汇总\eco-6w 1\5RS063-3000K.GOS

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.6V I:0.0289A P:5.769W PF:0.8663 Lamp Flux:595.366x1 lm		
NAME: 5RS063-3000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:001
MFR.: Suzhou Radiant Lighting Technology Co.,Ltd	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

C(DEG) g (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077	1077		
5	1040	1025	1007	993	976	964	952	947	940	939	937	941	942	953	960	974	983		
10	921	903	875	854	822	799	775	765	750	750	744	752	752	766	778	803	820		
15	737	709	668	640	602	580	552	541	520	515	512	521	525	543	556	585	606		
20	523	492	456	432	404	391	366	358	346	341	341	342	348	360	371	393	410		
25	347	325	308	289	275	251	227	216	214	212	212	215	215	218	228	243	266		
30	213	197	187	174	160	147	131	125	121	121	120	122	121	124	128	142	152		
35	120	112	106	100	92.0	83.9	75.4	72.1	69.1	70.1	69.3	70.2	69.0	71.3	72.6	80.5	87.3		
40	67.9	64.1	61.0	58.8	53.4	49.4	44.8	43.6	41.8	42.4	41.7	42.3	41.9	43.0	44.2	47.3	51.0		
45	41.1	39.3	37.6	37.0	34.2	32.2	30.0	29.1	28.1	28.2	28.0	28.2	28.0	29.0	29.7	30.8	32.6		
50	27.9	26.9	25.9	25.3	24.3	23.2	22.0	21.1	20.4	20.2	20.1	20.2	20.4	20.9	21.5	22.3	22.8		
55	20.5	19.8	19.0	18.7	18.3	17.4	16.3	15.7	15.2	15.2	15.2	15.1	15.1	15.5	16.1	16.6	17.0		
60	15.4	14.8	14.3	14.7	14.6	13.4	12.2	11.7	11.4	11.8	12.1	11.8	11.4	11.6	11.7	12.6	13.0		
65	11.7	11.1	11.0	11.6	11.4	10.5	9.15	8.49	8.57	9.14	9.25	8.92	8.42	8.33	8.63	9.47	10.2		
70	8.84	8.17	8.14	8.47	8.05	7.35	6.36	5.86	5.77	6.02	5.99	5.96	5.58	5.61	5.97	6.76	7.39		
75	6.09	5.58	5.17	4.98	4.58	4.15	3.51	3.26	3.06	3.14	3.09	3.12	2.99	3.04	3.30	3.80	4.24		
80	3.29	3.04	2.67	2.33	1.98	1.74	1.54	1.40	1.30	1.23	1.20	1.19	1.25	1.36	1.48	1.65	1.88		
85	1.38	1.16	0.94	0.71	0.50	0.27	0.16	0.05	0.05	0.01	0.03	0.00	0.05	0.06	0.15	0.25	0.46		
90	0.05	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.00	0.01	0.01	0.00	0.00	0.00	0.01	0.00		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:01  
 Test Date:2017-11-16

g Range: 0 - 90DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.0.279  
 Humidity:65.0%  
 Test Distance:8.989m [K=1.0000]  
 Remarks: